

NEW! NIBE NIBETTE 5

THE BEST KITCHEN BOILER

- The most hot tap water
- Stainless steel boiler



Features of the NIBE NIBETTE 5

- Immediate hot tap water without waiting
- Stepless temperature adjustment up to 80°C
- Increases comfort and lowers the Energy Performance Coefficient (EPC)
- Both the boiler vessel and the immersion heater are made of 316L stainless steel
- Energy and water saving

NIBE NIBETTE 5

The best kitchen boiler.

Always fits: both horizontal and vertical installation is possible. Content: 5.5 litres. Capacity of the immersion heater: 2.2 kW. Fitted with an EPP insulation jacket for maximum protection against heat loss. Very compact construction.

Can be placed on its side under a kitchen unit: no loss of space. Delivered complete with flexible connection hoses.

Quick and comfortable hot tap water in the kitchen


Undoubtedly you are familiar with the advantages that a built-in kitchen boiler offers: hot tap water at a comfortable temperature, no long waiting times and no wasting water. The majority of built-in boilers in kitchen cabinets take up valuable space. For this reason NIBE is introducing the NIBETTE 5: a compact built-in kitchen boiler that neither you nor your customer need to maintain after installation.

The highest quality

The NIBE NIBETTE 5 is compact and functional. With its modest dimensions (146 x 215 x 540 mm) it easily fits under the plinth of any kitchen cupboard. Its capacity is sufficient to

meet the limited demand for hot tap water in modern kitchens, which are usually fitted with a dishwasher.

As the only built-in kitchen boiler available on the market today the NIBETTE 5 is equipped with both a boiler vessel and an immersion heater made of SS 316: a guarantee for many years of carefree hot water comfort. Additionally, an EPP jacket ensures optimal insulation and keeps heat loss to a minimum. In brief: the new NIBE NIBETTE 5 offers your customers the highest professional quality for household applications.

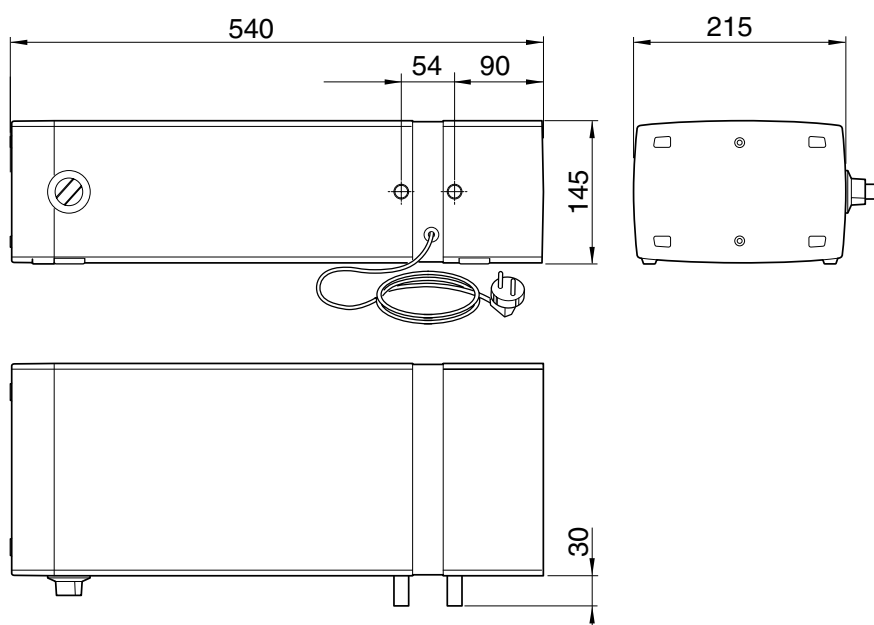

MODEL		NIBE NIBETTE 5
Boiler vessel	SSS	316L
Heating time to 45°C	min.	7
Heating time to 80°C	min.	13
Immersion heater	kW	2.2
Fuse	A	10
Power supply	V AC	230
Insulation class	IP	24
Height	mm	145
Length	mm	540
Width	mm	215
Boiler capacity	litre	5.5
Weight	kg	6
Max. operating pressure	bar	10
Cold and hot water connections	mm	15

KIF GB NIBETTE 5 M-10622 0817-1
NIBE makes reservations for any factual or printing errors.