PRODUCT CATALOG (IEC)

ABB UPS products and solutions

Power protection for critical infrastructures



Welcome to ABB's Power Protection catalog

The number of critical applications that simply cannot be allowed to go off line grows daily. These applications must be guaranteed a constant supply of high-quality power.

For customers who need full availability and fuss-free operation, ABB offers a comprehensive portfolio of UPS solutions. ABB's solutions are based on strong and stable architectures that make sure your important application is supported by the very best power protection system, ready to step in and take over at the first sign of trouble.

This product catalogue provides details of ABB's Power Protection solutions and will guide you in choosing which ones are suitable for your needs.

Our uninterruptible power supplies (UPS) and ancillary products cover a wide range of applications and power – from small offices to large data centers. And for each and every user ABB's mission is to provide power protection that ensures the highest availability and the lowest cost of ownership.

Sustainably manufactured in Switzerland to the highest of standards, ABB's Power Protection products employ a variety of technologies – from traditional designs to our leading range of modular products that allow a power protection system to be added to module by module, as and when required. This reduces initial capital outlay and simplifies maintenance.

ABB is always there to provide consultancy so that you can choose the product that is exactly right for you. And afterwards, our global, first-class service organization is at your disposal in more than 100 locations.

Please browse the catalogue to learn more about the ABB Power Protection group, our approach to power protection and details of our products. If you require guidance, we are always ready to assist you in person, or you can visit www.abb.com/ups.

Table of contents

004–004 **About us**

005–005 **ABB's vision and values**

006–007 **ABB's UPS manufacturing principles**

008–009 **ABB's UPS service offering**

010–013 **ABB's modular UPS design**

014–015 **Choose the right power protection solution**

016–019 **DPA UPScale ST**

020–023 **DPA UPScale RI (rack-independent)**

024–027 **Conceptpower DPA**

028–031 **DPA 250 S4**

032–035 **Conceptpower DPA 500**

036–039 **PowerLine DPA 20–120 kVA**

040–041 **PowerValue 11LI Up**

042–043 **PowerValue 11LI Pro**

044–047 **PowerValue 11T G2**

048–051 **PowerValue 11 RT**

052–055 **PowerValue 11 / 31 T**

056–059 **PowerScale**

060–065 **PowerWave 33**

066–066 **Xtra VFI**

067–067 **Tested and trusted**

068–071 **Battery cabinets and accessories**

072–075 **Connectivity solutions**

About us



The ABB Power Protection product group was formed from the combination of the ABB product lines: UPS, Power Solutions and Power Conditioning. These three strands of technology each have their own history and each ultimately has as a background ABB's vast experience in electrical engineering that stretches back over a century.

From the very start, ABB was a UPS innovator and by 1994 had designed, manufactured and launched its first generation of three-phase, transformerless standalone UPS.

Further innovation followed and the UPS product portfolio grew through several generations to cover three-phase applications and ever-higher powers.

In 1998, the first generation of modular UPSs was introduced. A modular UPS delivers total flexibility and availability as well as a low total cost of ownership. ABB's patented decentralized parallel architecture – DPA, the foundation of the modular approach – has proven to be a runaway success with customers.

Over the past two decades, via organic growth and acquisitions, ABB's UPS offering has become more comprehensive and diverse and now covers most application requirements, especially those of the demanding data center industry.

ABB are at the forefront of power protection technology and the company's UPS portfolio complements the rest of ABB's Power Protection offering to give a unique line-up of UPS, power conditioning and power switching products that deliver end-to-end solutions to all kinds of power quality issues in almost every conceivable commercial and industrial situation. An expanding team of local business units and channel partners complete the line-up to position ABB for further growth in the global UPS and power protection market.

In a world that is becoming ever more competitive, ABB's UPS products make power protection simple, energy-efficient and always available.

ABB's vision and values
– power and productivity for a better world

For a company to know its direction of travel and know what it stands for, it has to have visions and values.

"Power and productivity for a better world" describes what ABB stands for. In power we are a leader in addressing power infrastructure and control needs for utilities, industry, transport and infrastructure. In productivity – ABB is a leader in operational asset effectiveness – we support our customers in achieving high uptime and speed while reducing waste.

"… a better world" refers to our value proposition to decouple economic growth from environmental pollution. Based on our offering and technologies, we are well positioned to enable growth with less relative energy consumption and make the still-needed energy supply cleaner and more sustainable.

Our vision is clear: our daily actions need to be built on the right set of values – and not only for the world of today but also for the world of tomorrow.



Our values can be summarized as five value pairs that are both fundamental and inspirational:

Safety and integrity
This value pair is the bedrock of our organization. We do not accept business if it means putting people at risk or engaging in unethical practices. At ABB, we take care of ourselves and we look out for our colleagues.

Customer focus and quality
The customer has to be at the center of all our activities – and when we reach them we need to deliver with utmost quality in everything we do. Knowing our customers better, being perceived as having a clear focus on them and providing high-quality offerings and services will make us the partner of choice.

Innovation and speed
Innovation is at the core of our value proposition and will continue to be critical in strengthening and enhancing our competitive position – in daily business, and as we expand our offering towards engineering / consulting, software and value-added services. Speed is essential in everything we do – being efficient with a high quality and without haste is the art that we are committed to mastering.

Ownership and performance
Strengthening clear lines of responsibility and accountability across our organization is a key part of our Next Level strategy. Institutional and individual performance are key to continue to not only survive but succeed in a demanding world. Performance is what is expected from all of us every day – not only continuing what we are doing, but also taking a step forward.

Collaboration and trust
ABB's future, its enhanced competitive strength, must be built around better, more natural collaboration aimed at providing superior customer value. The organization, with undiluted business line responsibilities and empowerment closer to the customer, enables the business, regional / country and functional leaders to collaborate more and more efficiently.

ABB's UPS manufacturing principles

In ABB, quality is an integral part of our business ethos. Quality guides our actions to ensure we meet our responsibilities and obligations to our customers, our employees, our partners, our suppliers and to our shareholders.

ABB's commitment to deliver high quality

- Deliver on-time and on-quality products, systems and services that meet or exceed our customers' expectations.
- Identify and understand our customer's expectations, measure customer perceptions and implement improvements to increase customer satisfaction.
- Enable and engage our employees at all levels in a relentless drive to improve operational performance along the value chain from suppliers to customers.
- Increase the motivation and skills of our employees to add value to our customers and our businesses through continual training and development.
- Leverage our partners' and suppliers' strengths to improve our products and our businesses from product design through production, installation and operation.
- Embed social responsibility and company ethics policies in our business practices.
- Continually improve environmental, health and safety performance through all products, operations, systems and services.

Manufacturing

Quality in manufacturing begins with the order from the customer. We practice made-to-order manufacturing – a lean approach that exploits just-in-time supply and that treats each and every customer order as a single, valuable entity. Each product is individually tested before leaving the factory with a 100 percent pretest on modules individually and a 100 percent final test on modular and standalone UPSs.

Quality only becomes quality when it is measured and for this reason we employ key performance indicators (KPIs) some of which are:

- Safety
- Quality from the suppliers (part-per-million defect rates and on-time delivery)
- Quantity of products / items produced for new business and for service departments (after sales)
- Internal first-pass yield
- On-time delivery of the finished product



Product quality assurance
In ABB, we believe in getting it right the first time – and keeping it that way. For that reason, we engage in component homologation as well as the identification of critical components. Suppliers are fully vetted and qualified, on an ongoing basis, and our test verification plan and type testing assures our quality standards even further.

The ABB product development gate model is deployed all the way through to product launch – from initial conception through development to final full release, and after – right up to gate seven. The gate model involves every part of the organization and this ensures that every aspect of the new product is covered, guaranteeing the very best quality.

Should non-conformities arise, ABB has a comprehensive set of monitoring tools with which to examine the issue. This is backed up by a three-level support model:
- **Level 1:** solving problems in the field
- **Level 2:** statistical analysis and mitigation action definition
- **Level 3:** root cause analysis

Environmentally friendly
ABB has stated policies that drive the company to be as environmentally friendly as possible. One example of this is our product test bay used for all UPS final testing, which features an energy recovery system. This so-called GREEN (Generating Recycled Ecological Energy Network) test bay is a facility that recycles the greater part of the energy used during a UPS test. Only nine percent of the energy used is from the mains; 91 percent is recovered energy. This re-use is far more beneficial than having a traditional resistor load that merely turns the energy into heat, thus wasting it.

Further, the modern ABB building has an efficient heating / cooling system (energy management) as well as strict rules for recycling and managing discards.

Certification
Product certification
- Accredited third-party certification:

	UPS standards	Low-voltage devices standards
Safety	IEC / EN 62040-1	IEC / EN 60950-1
EMC	IEC / EN 62040-2	IEC / EN 61000-6-2 IEC / EN 61000-6-4 IEC / EN 61000-4-2 IEC / EN 61000-4-3 IEC / EN 61000-4-4 IEC / EN 61000-4-5 IEC / EN 61000-4-6
Performance	IEC / EN 62040-3	
Environmental aspects	IEC / EN 62040-4	

Factory certification
- ISO 9001 and 14001
- OHSAS18001

ABB’s UPS service offering



A truly global service organization. ABB is at your service worldwide. UPS service experts support customers around the world from more than 100 locations.

Our service network

Good customer service is the lifeblood of any business or organization. This fact is well understood by ABB and is the fundamental reason why good customer service is driven by ABB management and is of equal importance for all staff.

ABB’s service footprint for the UPS product line is global and is provided by ABB itself or by members of ABB’s partner network. All ABB and partner service engineers go through intense product-specific training before they are allowed to carry out service work at a customer site.

Customers can contact their local ABB representative or the nominated ABB partner for assistance. A local field service engineer will help the customer to solve the issue, either by phone or by going onsite. If the field service engineer is in need of assistance, they are able to contact the round-the-clock, 24 × 365 ABB support line in Switzerland. The support line expert assists the local field service engineer in solving the issue by phone and electronic ticketing system as well as local intervention when required. The support team experts are always on duty and will return any call at any time.



During this whole process, the support line expert will be the only point of contact for the local service engineers. This ensures consistency and constant improvement of service, and that the customer is kept fully informed. This level of customer care is a key aspect of ABB's service concept and ensures an increase of competence on all levels. ABB or partner service personnel will often be on-site – for regular maintenance management, on-site commissioning and start-up, product care and so on. They are also available to provide training, and to deliver technical information and documentation.

Factory acceptance tests (FATs) are also a key responsibility for ABB service – standard FATs, special FATs on customer request, FAT management and reports, and associated logistics coordination are all part of this activity. ABB is fully committed to providing top-quality service to ensure that the customer enjoys the very best performance from their ABB products and can use them with full integrity and safety.

ABB’s modular UPS design

Ensuring high availability and low total cost of ownership

—
01 In DPA, each UPS module has all the hardware and software it needs for autonomous operation.

ABB’s approach to modular power protection
Despite all the precautions taken during the design and operation of data centers and related control processes, situations can arise in which external power is compromised – either in terms of quality or availability. Such events could result in data loss, nonavailability of essential services, risk to hardware and very high financial losses. This makes a highly dependable UPS mission-critical. Therefore, the most critical loads should be protected by the very best UPS design – Decentralized Parallel Architecture (DPA™).

ABB, a pioneer and leader in large, modular UPSs, provides a full range of modular DPA power protection products as well a standalone solutions. In the following four pages, we will focus on our approach to modular power protection and describe how these modular solutions can help ensure a supply of clean, reliable power to the customer’s application.


DPA architecture
Key benefits
- Distributed control and power
- No single point of failure
- Independent online swappable modules

In DPA, each UPS module contains all the hardware and software required for full UPS system operation. Modules share no common components and each module is a fully functional UPS, so a DPA parallel system offers extremely high system reliability and uptime is maximized. UPS modules can be paralleled to provide redundancy or to increase the system’s total capacity.

Some modular UPS systems with a centralized parallel architecture (CPA) have centralized control or hardware. This renders them very vulnerable should a fault occur on one of these centralized components; one fault can bring down the entire UPS system.

With DPA, on the other hand, the UPS is modularized and each module has all the hardware and software needed for autonomous operation – rectifier, inverter, battery converter, static bypass switch, back-feed protection, control logic, display, and mimic diagram for monitoring and control. With all the critical components duplicated and distributed between individual units, potential single points of failure are eliminated. In the unlikely event of one UPS module failing, the failed module will be automatically isolated and the overall system will continue to operate normally.

Modular UPS with no common components (Decentralized Parallel Architecture)

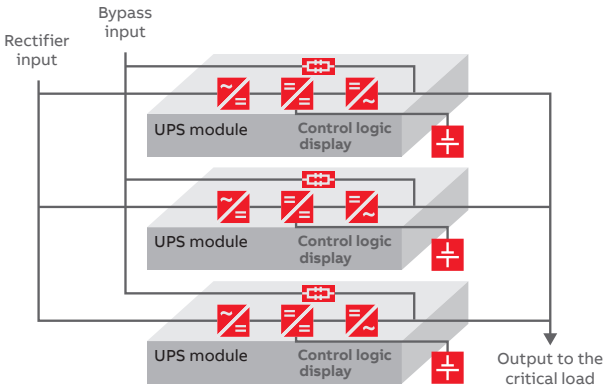

—
01

—
01 Vertical scalability: one to five modules in one single cabinet. Horizontal scalability: cabinets in parallel configuration up to 3 MW

Online swappable modules (OSM)
Key benefits
- Replace or add modules with no downtime
- Simple power upgrade
- No downtime during maintenance

True “online-swap” modularity enables the safe removal and insertion of UPS modules without risk to the critical load and without the need to either transfer it onto raw mains or remove power from it. Modules can therefore be replaced or added without any system downtime. It is simple to upgrade power capability as critical load power requirements grow. Additionally, modules can easily be removed for service or replaced if faulty, without compromising the availability of the system. Only a truly redundant architecture like DPA allows online modules to be swapped out while the system is running.

This unique aspect of modularity directly addresses continuous uptime requirements, significantly reduces mean time to repair (MTTR), reduces inventory levels of spare parts and simplifies system upgrades. This approach pays off too when it comes to serviceability and availability, as there is no downtime and the service personnel do not need special skills.

Scalability
Key benefits
- Vertical and horizontal scalability
- Cost-effective “rightsizing”
- Easy configuration and reconfiguration

The ability to scale the system means the UPS can be sized exactly to fit prevailing needs and modules can simply be added as requirements grow. This means that you only power, cable and cool what you need.

The Conceptpower DPA 500, for example, allows five 100 kW modules to be mounted in one cabinet and six cabinets to be configured in parallel to provide a top rating of 3 MW. Power consumption is the topic of greatest concern for data center operators and the energy savings made by this modular approach over the service life time of the UPS are substantial. Human error is reduced too: Because things are so simple, wiring errors are eliminated, and configuration and reconfiguration are child’s play.

Scalability up to 3 MW



—
01

ABB's modular UPS design

Ensuring high availability and low total cost of ownership

Availability
Key benefits
- 99.9999% (6 nines) availability

By combining the benefits of Decentralized Parallel Architecture, parallel redundancy and online swap modularity, ABB's UPSs have a high mean time between failure (MTBF) and a low mean time to repair (MTTR). This delivers six nines availability – a highly desirable quality required by data centers in pursuit of zero downtime.

The surest way to increase availability of power is to introduce redundancy to the UPS system and to minimize its maintenance and repair time. MTBF and MTTR are common parameters in the UPS industry and both impact system availability. Availability is formally defined as:
MTBF / (MTBF +MTTR) ×100%


The modular DPA concept allows the modules to work as one system but without interdependence. Quick and simple repair by swapping modules, which can be held as spares on-site or at a nearby service center, minimizes the system's MTTR.

Low total cost of ownership
Key benefits
- Over 97% true online efficiency
- Eco-mode efficiency ≥99%
- Cost-effective scalability to "right size" system
- Low service costs

The modularity and scalability described help minimize the cost of ownership, but costs are held down too by implementing designs that have best-in-class energy efficiency.


ABB's DPA 250 S4, for example, operates with an efficiency of over 97 percent. Its efficiency curve is very flat so there are significant savings in every working regime. Further energy savings can be made by operating the UPS in eco-mode, which increases the efficiency to ≥99 percent.

Online double conversion efficiency

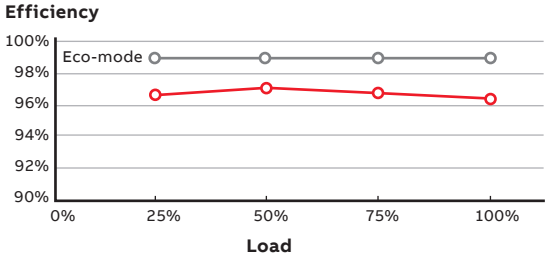

—
01 Example of a changing (increasing) load up to 120 kW in 4 years.
—
02 Vertical modularity minimizes space requirements and maximizes predictability of future space requirements. In the example shown, 2 m² is saved.

The UPS capacity can be changed with changing load, eliminating the need to oversize the UPS upfront.

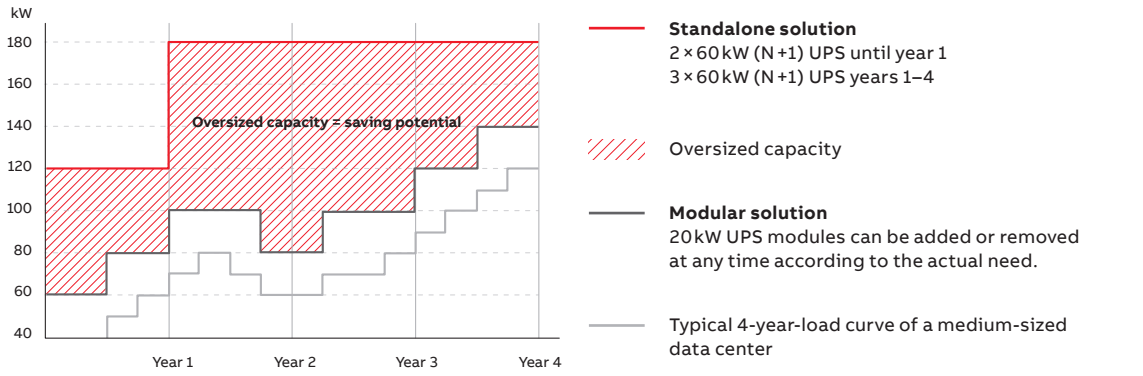


—
01

Modularity lends itself well to keeping UPS footprint small, too – ideal for data centers, where real estate can be restricted and expensive. A modular UPS rack has a small footprint and when extra modules are added, no extra floor space is taken up.

But the advantages of DPA modularity go further as installation and servicing costs are also kept low: A straightforward modular concept simplifies and speeds every step of the deployment process – from planning, through installation and commissioning to full use. DPA modularity also reduces costs as service engineers need less training and spend less time on-site, and any risks of data or production loss are minimized. Inventory levels of spare parts are reduced.

Highly dependable UPSs are mission-critical for many parts of industry. DPA delivers unmatched UPS availability and serviceability, scalability, flexibility and low energy usage.

There are no better UPS architectures available to those users whose critical electrical loads represent a valuable commercial asset that must be kept powered at all costs.

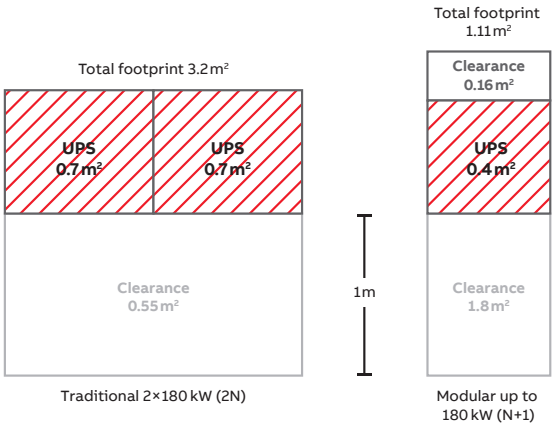


—
02

Choose the right power protection solution

At the core of our business is a technically advanced product portfolio of high-quality and reliable three-phase and single-phase transformerless uninterruptible power supplies. All our UPSs provide online double conversion topology and are designed for continuous power protection of critical equipment against all power problems: power failure, power sag, power surge, undervoltage, overvoltage, switching transient, line noise, frequency variation and harmonic distortion.

ABB's modular UPSs


UPS cabinet rated power

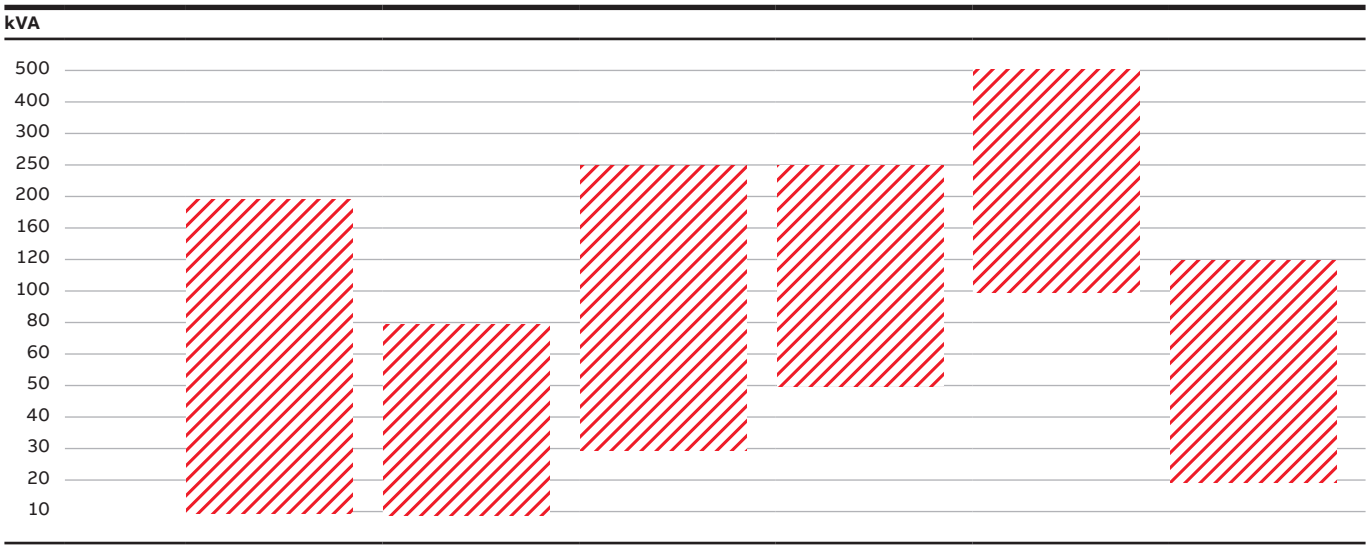

Product	DPA UPScale ST	DPA UPScale RI	Conceptpower DPA	DPA 250 S4	Conceptpower DPA 500	PowerLine DPA
						
Parallelable	Up to 20 modules	–	Up to 30 modules	Up to 6 units	Up to 30 modules	Up to 30 modules
System power	400 kW	80 kW	1500 kVA	3000 kW	3000 kW	120 kVA
Application	Network, server and storage	Network, server and storage	Data center and facility	Data center and facility	Data center and facility	Industrial applications
UPS type	Three-phase modular UPS	Three-phase modular UPS (rack-independent)	Three-phase modular UPS	Three-phase modular UPS	Three-phase modular UPS	Three-phase and single-phase modular UPS

ABB's standalone UPSs

UPS cabinet rated power

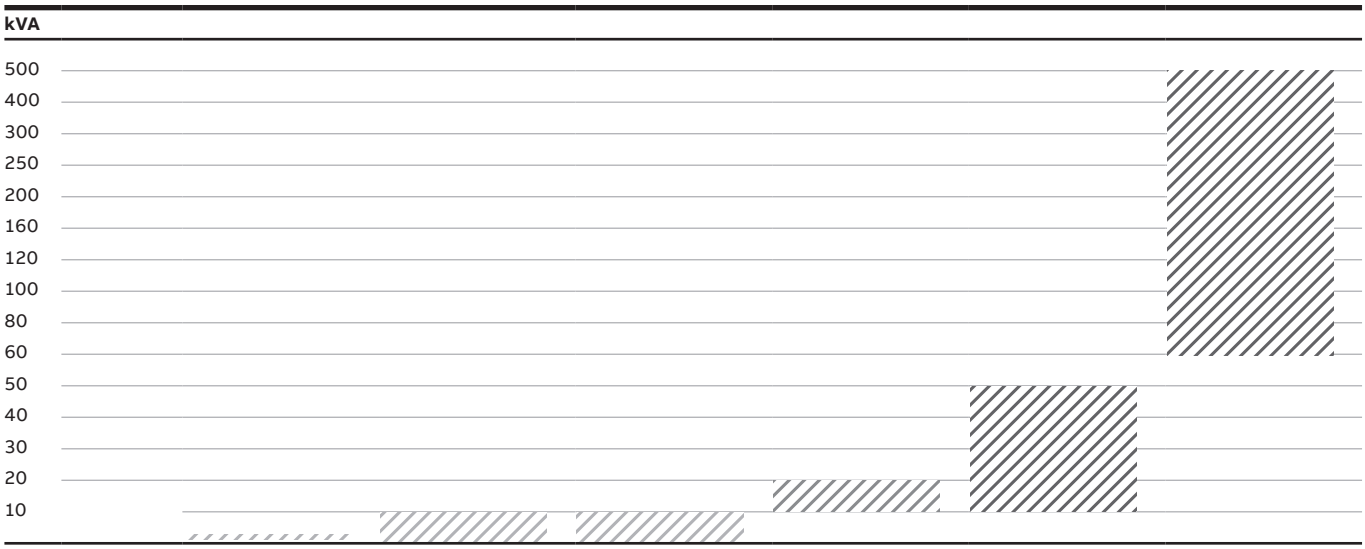




Parallelable	-	Up to 3 units	Up to 3 units	Up to 4 units	Up to 20 units	Up to 10 units
System power	Up to 1400 W	Up to 30 kW	Up to 30 kW	80 kVA	1000 kVA	5000 kW
Application	Workstation and home office	Workstation and home office	Workstation and home office	Workstation and home office	Network, server and storage	Data center and facility
UPS type	Single-phase standalone tower	Single-phase standalone tower	Single-phase rack or tower convertible	Single-phase standalone tower	Three-phase standalone tower	Three-phase standalone tower

DPA UPScale ST

The modular UPS designed for low and medium power applications

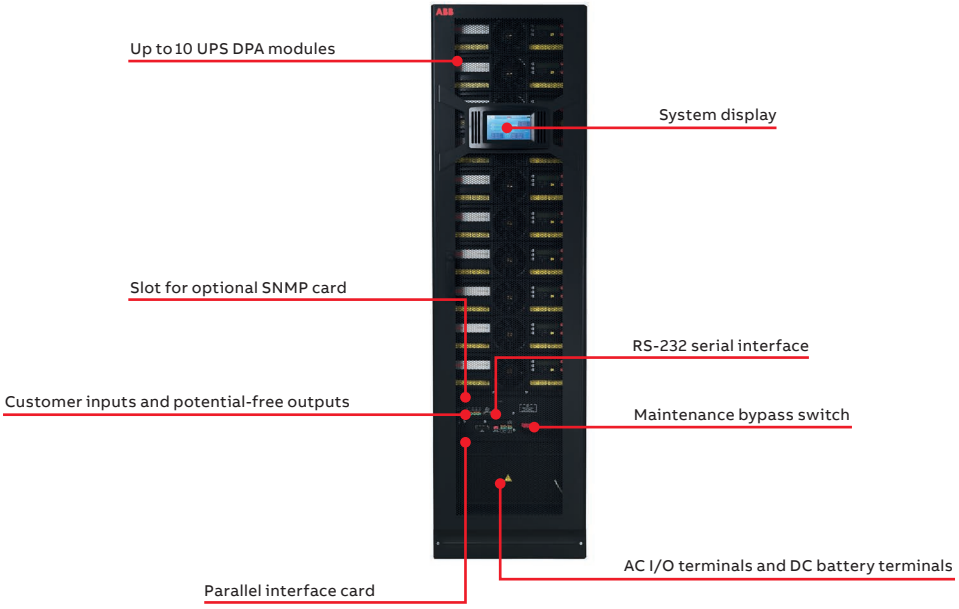

ABB's DPA UPScale ST is available for high applications requiring an all-in-one power protection solution that includes frame, UPS, battery and communications. The solution delivers power protection from 10 kW to 200 kW in 10 kW or 20 kW modular steps. For a continuously growing mid-frastructure, DPA UPScale ST can be paralleled horizontally to increase the capacity up to 400 kW. This fully scalable and easily maintained UPS gives you unparalleled uptime and energy efficiency.

99.9999% (6 nines) availability
- Decentralized Parallel Architecture
- No single points of failure
- Redundant capacity (N+1) per frame
- Replace or add modules with no downtime
- Short mean time to repair


Low total cost of ownership
- Up to 96% true online efficiency
- Eco-mode efficiency ≥98%
- Unity power factor (kW = kVA)
- Low input harmonic distortion (THDi <3%)
- Small footprint / high power density (472 kW/m²)

All-in-one solution
- Power range from 10 kW to 200 kW in a single frame
- Internal batteries for short autonomies and external battery cabinets for long autonomies
- User-friendly interface per module and system level
- Remote control and monitoring options available

Efficient service concept
- Simple power upgrade
- Fast maintenance
- Full front access
- Reduced spare parts needed

DPA UPScale ST
Product features


Full vertical and horizontal scalability
The DPA UPScale ST's modular design provides a vertical scalable power system from 10 kW up to 200 kW (180 kW N+1) in a single cabinet in 10 kW or 20 kW modular steps. For a continuously growing mid-size infrastructure, the DPA UPScale ST system can be paralleled horizontally to increase the capacity up to 400 kW. The ability to increment the power as the critical load grows optimizes the operating efficiency and reduce the initial cost for installations.

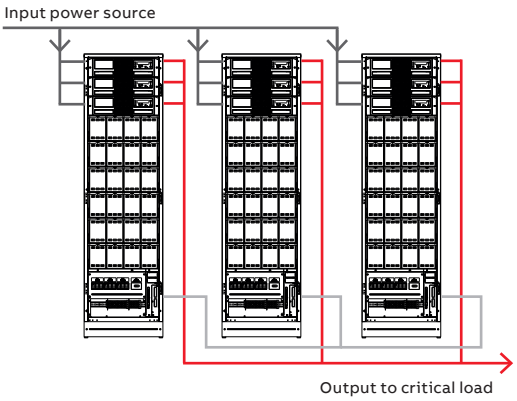


Cabinet type	ST40	ST60	ST80	ST120	ST200
Number of modules per cabinet	1 to 2	1 to 3	1 to 4	1 to 6	1 to 10
Parallel frames per system	4	4	4	3	2
Max. number of modules per system	8	12	16	18	20
Max. total system capacity w/o redundancy	160 kW	240 kW	320 kW	360 kW	400 kW

The ideal solution for small- to medium-sized critical power IT applications
The DPA UPScale ST can be deployed in a variety of small- to medium-sized system architectures. In addition to traditional server load applications, the DPA UPScale ST is ideal to protect critical applications such as building management systems (BMS). Large facilities are often provided with BMS to control and monitor the building's mechanical and electrical systems such as ventilation, lighting, fire alarms and security. The BMS is designed to create and maintain a safe, productive and comfortable environment, thus increasing operational efficiency, decreasing the energy consumption and ensuring the safety of personnel and equipment.


The DPA UPScale ST offers clean backup power for sensitive electronic devices (controllers, I/O devices and user interfaces) designed to monitor and control the infrastructure thus avoiding loss of data or damage to equipment.

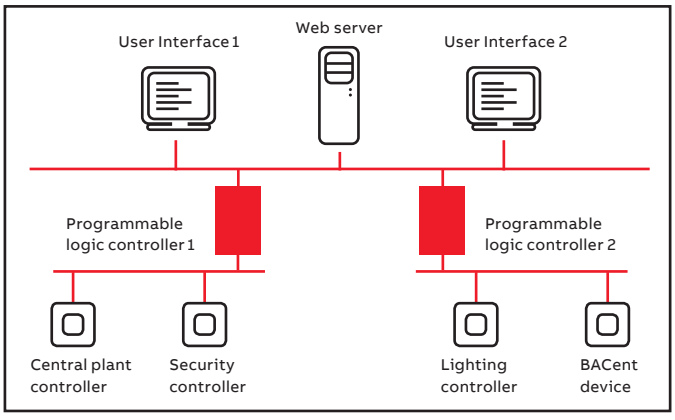

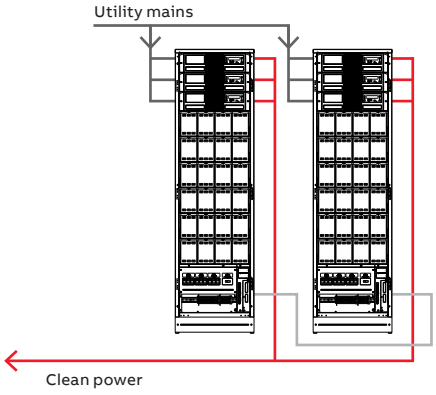



DPA UPScale ST
Available models






Cabinet type	ST40	ST60
Number of modules	1 to 2	1 to 3
Dimension w × h × d	550 × 1135 × 775 mm	550 × 1975 × 775 mm
Internal battery capacity	Up to 80 blocks 7 / 9 Ah	Up to 240 blocks 7 / 9 Ah







Cabinet type	ST80	ST120	ST200
Number of modules	1 to 4	1 to 6	1 to 10
Dimension w × h × d	550 × 1135 × 775 mm	550 × 1975 × 775 mm	550 × 1975 × 775 mm
Internal battery capacity	–	–	–

UPS cabinet configuration
- Up to ten online double conversion UPS modules
- LCD control panel per module
- Input, bypass and battery protection fuses
- Manual bypass switch
- Single- and dual-input feed available
- Free space to place internal batteries (only ST40 / ST60)


Options
- Parallel system configuration
- Integrated back-feed protection
- Cold start
- Halogen-free cabling
- Internal batteries (only ST40 / ST60)
- Battery temperature sensor
- Remote panel (graphical touch screen display)
- System display (graphical touch screen display)
- Control and monitoring (ModBus RS-485, ModBus TCP/IP, SNMP)
- External battery cabinets

DPA UPScale ST
Technical specification

General data	ST40	ST60	ST80	ST120	ST200
System power range	10–400 kW				
Nominal power per module	10 kW / 20 kW				
Nominal power / frame	40 kW	60 kW	80 kW	120 kW	200 kW
Number of UPS modules	1 to 2	1 to 3	1 to 4	1 to 6	1 to 10
Max. number of inbuilt batteries (7 / 9 Ah)	80	240	–	–	–
Output power factor	1.0				
Topology	Online double conversion				
Parallel configuration	Up to 20 modules (up to 4 frames)				
UPS type	Modular (Decentralized Parallel Architecture)				
Input					
Nominal input voltage	3 × 380 / 220 V + N, 3 × 400 / 230 V + N, 3 × 415 / 240 V + N				
Voltage tolerance (referred to 3 × 400 / 230 V)	For loads <100% (–20%, +15%), <80% (–25%, +15%), <60% (–35%, +15%)				
Input distortion THDi	≤3%				
Frequency	35–70 Hz				
Power factor	0.99				
Output					
Rated output voltage	3 × 380 / 220 V + N, 3 × 400 / 230 V + N, 3 × 415 / 240 V + N				
Voltage distortion (referred to 3 × 400 / 230 V)	<1.5%				
Frequency	50 Hz or 60 Hz				
Overload capability	1 min.: up to 150% / 10 min.: up to 125%				
Unbalanced load	100% (all three phases regulated independently)				
Crest factor	3:1 (load supported)				
Efficiency					
Overall efficiency	Up to 96%				
In eco-mode configuration	98%				
Environment					
Storage temperature	–25 °C to +70 °C				
Operating temperature	0 °C to +40 °C				
Altitude configuration	1000 m without derating				
Communications					
LCD	Yes (per module); system display optional (graphical touch screen display)				
LEDs	LED for notification and alarm				
Communication ports	USB, RS-232, SNMP slot, potential-free contacts				
Standards					
Safety	IEC / EN 62040-1				
Electromagnetic compatibility (EMC)	IEC / EN 62040-2				
Performance	IEC / EN 62040-3				
Product certification	CE				
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001				
Weight, dimensions					
Weight (with modules / without batteries)	Up to 135 kg	Up to 238 kg	Up to 168 kg	Up to 262 kg	Up to 389 kg
Dimensions w × h × d (mm)	550 × 1135 × 775	550 × 1975 × 775	550 × 1135 × 775	550 × 1975 × 775	550 × 1975 × 775

DPA UPScale RI (rack-independent)

The modular UPS for customized power protection solutions

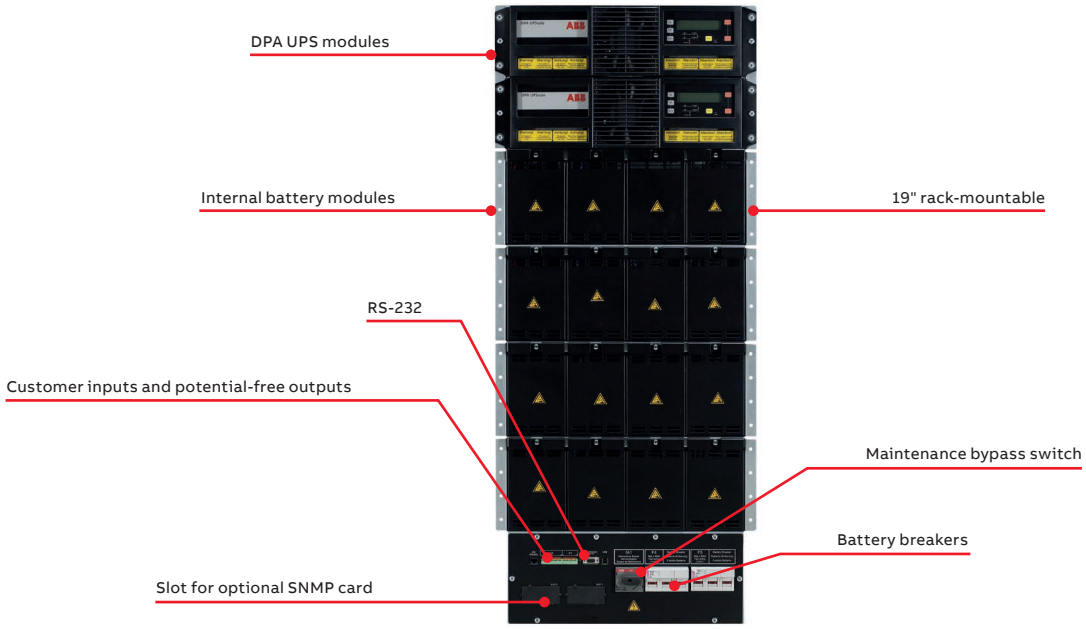

The rack-independent DPA UPScale RI is one of the most compact UPS systems on the market that is suitable for custom-designed solutions. Being modular and rack-mountable, it provides an ideal system from the technical and commercial point of view for when a flexible solution is required. The DPA UPScale RI, including UPS, battery and communication, can be integrated into any 19" rack (independent of manufacturer) and provides up to 80 kW (60 kW N +1) making it ideal for integrated IT, telecom or other critical control processes.





99.9999% (6 nines) availability
- Decentralized Parallel Architecture
- Replace or add modules with no downtime
- Short mean time to repair
- No single points of failure

Low total cost of ownership
- Up to 96% true online efficiency
- Eco-mode efficiency ≥98%
- No single points of failure
- Small footprint / high power density
- Unity power factor (kW = kVA)
- Low input harmonic distortion (THDi <3%)




Easy customization
- Rack-independent
- Efficient manufacture of individual solutions with standard products
- High local added value for system integrators

Efficient service concept
- Simple power upgrade
- Fast maintenance
- Reduced spare parts needed

DPA UPScale RI
Available models

Subrack type	RI10	RI11	RI12	RI20
Number of modules	1	1	1	1 to 2
Dimension w × h × d	448 × 310 × 565 mm	448 × 487 × 735 mm	448 × 665 × 735 mm	448 × 440 × 565 mm
Internal battery capacity	–	Up to 40 blocks 7 / 9 Ah	Up to 80 blocks 7 / 9 Ah	–

Subrack type	RI22	RI24	RI40
Number of modules	1 to 2	1 to 2	1 to 4
Dimension w × h × d	448 × 798 × 735 mm	448 × 1153 × 735 mm	448 × 798 × 735 mm
Internal battery capacity	Up to 80 blocks 7 / 9 Ah	Up to 160 blocks 7 / 9 Ah	–

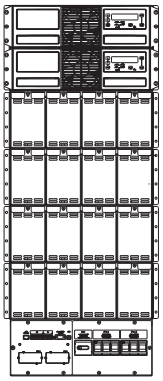UPS subrack configuration
- Up to four online double conversion modules
- Individual module display
- Input, bypass and battery protection fuses
- Manual bypass switch
- Single- and dual-input feed available
- Free space to place internal battery modules (only for UPScale RI 11 / 12 / 22 / 24)
- Communication interfaces: RS-232 port, five input / output dry contacts (incl. EPO and GEN On)

Options
- Integrated back-feed protection
- Cold start
- Halogen-free cabling
- Conformal coating
- Internal battery modules
- Battery temperature sensor
- Remote panel (graphical touch screen display)
- Control and monitoring (ModBus RS-485, ModBus TCP/IP, SNMP)

DPA UPScale RI
Technical specification


General data	RI10	RI11	RI12	RI20	RI22	RI24	RI40
Nominal power per module	10 kW / 20 kW						
Nominal power / frame	20 kW	20 kW	20 kW	40 kW	40 kW	40 kW	80 kW
UPS modules	1	1	1	1 to 2	1 to 2	1 to 2	1 to 4
Maximum number of inbuilt batteries (7 / 9 Ah)	–	40	80	–	80	160	–
Output power factor	1.0						
Topology	Online double conversion						
UPS type	Modular (Decentralized Parallel Architecture)						
Input							
Nominal input voltage	3× 380 / 220 V + N, 3× 400 / 230 V + N, 3× 415 / 240 V + N						
Voltage tolerance (referred to 3× 400 / 230 V)	For loads <100% (–20%, +15%), <80% (–26%, +15%), <60% (–35%, +15%)						
Input distortion THDi	≤3%						
Frequency	35–70 Hz						
Power factor	0.99						
Output							
Rated output voltage	3× 380 / 220 V + N, 3× 400 / 230 V + N, 3× 415 / 240 V + N						
Voltage distortion	<1.5%						
Frequency	50 Hz or 60 Hz						
Overload capability	1 min.: 150% / 10 min.: 125%						
Unbalanced load	100% (all three phases regulated independently)						
Crest factor	3:1 (load supported)						
Efficiency							
Overall efficiency	Up to 96%						
In eco-mode configuration	98%						
Environment							
Storage temperature	–25 °C to +70 °C						
Operating temperature	0 °C to +40 °C						
Altitude configuration	1000 m without derating						
Communications							
LCD	Yes (per module)						
LEDs	LED for notification and alarm						
Communication ports	USB, RS-232, SNMP slot, potential-free contacts						
Standards							
Safety	IEC / EN 62040-1						
Electromagnetic compatibility (EMC)	IEC / EN 62040-2						
Performance	IEC / EN 62040-3						
Product certification	CE						
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001						
Weight, dimensions							
Weight (with modules / without batteries)	Up to 39 kg	Up to 62 kg	Up to 78 kg	Up to 68 kg	Up to 109 kg	Up to 136 kg	Up to 136 kg
Dimensions w × h × d (mm)	488 × 310 × 565 (7 HU)	488 × 487 × 735 (11 HU)	488 × 665 × 735 (15 HU)	488 × 440 × 565 (10 HU)	488 × 798 × 735 (18 HU)	488 × 1153 × 735 (26 HU)	488 × 798 × 735 (18 HU)



Only a truly redundant architecture like DPA allows online modules to be swapped out while the system is running.

Conceptpower DPA

The modular UPS for medium-sized critical applications

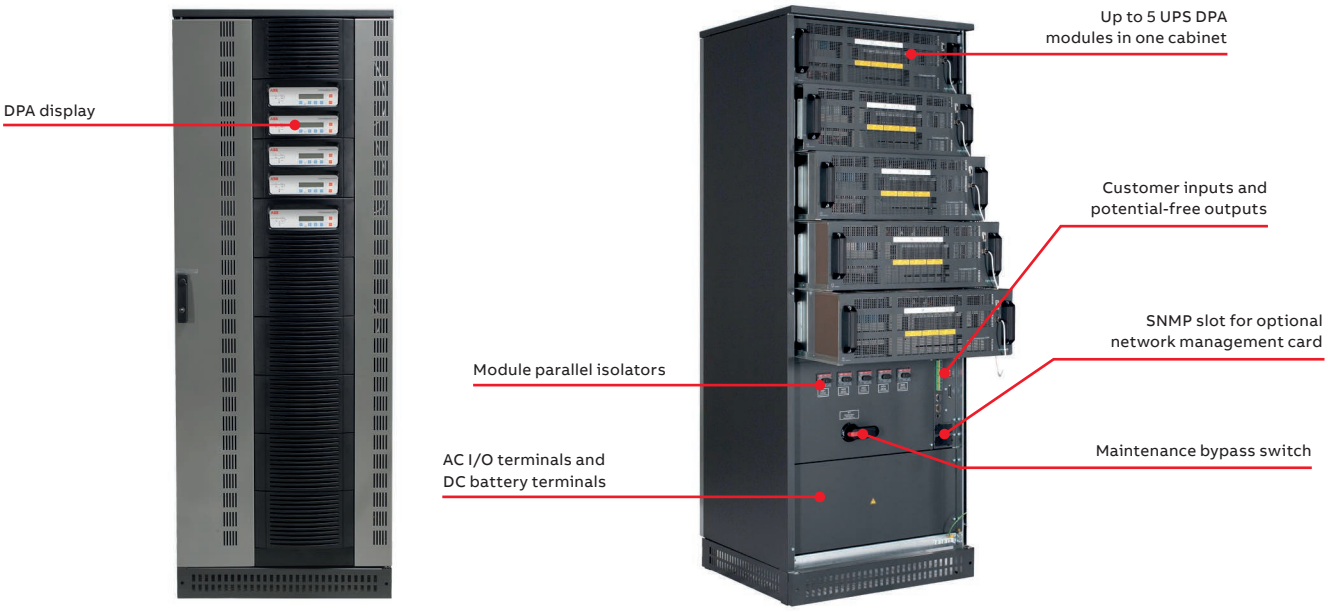

The Conceptpower DPA is a true double conversion modular UPS designed for medium-sized critical applications. The Conceptpower DPA's modular architecture provides very flexible power configuration based on 30 / 40 / 50 kVA modules that can be added as power requirements grow – thus eliminating oversizing and minimizing up-front capital investment. Each DPA module is self-contained and can be online-swapped at any time, so nothing has to be ever transferred to by-pass – making routine maintenance safe and easy.


99.9999% (6 nines) availability
- Decentralized Parallel Architecture
- Replace or add modules with no downtime
- Short mean time to repair
- No single points of failure


Cost effective "right-sizing"
- Scalable up to 1.5 MVA
- Vertical and horizontal scalability

Low total cost of ownership
- Up to 95.5% true online efficiency
- Eco-mode efficiency ≥98%
- Small footprint / high power density
- Low input harmonic distortion (THDi ≤3.0%)

Efficient service concept
- Simple power upgrade
- Fast maintenance
- Reduced spare parts needed
- Full front access

Conceptpower DPA
Available models

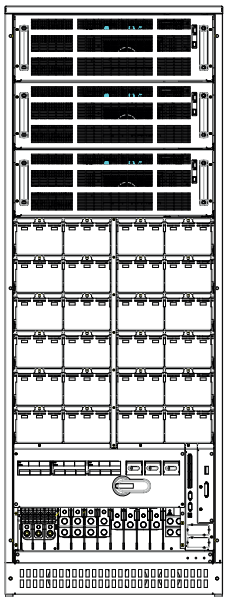

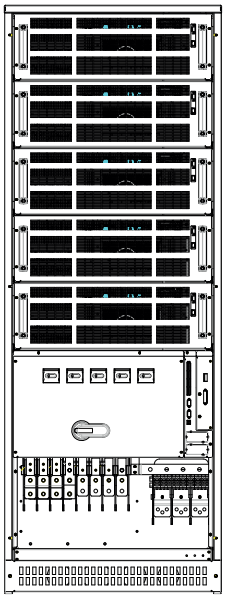

Cabinet type	Conceptpower DPA 150 kVA	Conceptpower DPA 250 kVA
Number of modules per cabinet	1 to 3	1 to 5
Dimension w × h × d	730 × 1975 × 800 mm	730 × 1975 × 800 mm
Internal battery capacity	Up to 240 blocks 7 / 9 Ah	–
Weight in kg	379 (with modules / without batteries)	439 (with modules / without batteries)

UPS cabinet configuration
- Online double conversion UPS
- Input, bypass and battery protection fuses
- Inbuilt back-feed protection
- Individual module display
- Inbuilt module isolator
- Free space to place internal battery modules (DPA – 150 kVA frame only)
- Single- and dual-input feed available
- Manual bypass switch
- Communication interfaces: RS-232 and USB ports, I/O dry contacts (EPO, GEN On, …)

Options
- Synchronization kit
- Cold start
- Control and monitoring (ModBus RS-485, ModBus TCP/IP, SNMP and others)
- Halogen-free cabling
- Battery temperature sensor
- External battery cabinets




ABB’s innovative modular UPS design helps you keep Total Cost of Ownership (TCO) under control – while providing best-in-class UPS functionality. Just install the modules you need and add more later, as required – that way you just power and cool as much UPS as you need.

Conceptpower DPA
Technical specification

General data	Conceptpower DPA 150 kVA	Conceptpower DPA 250 kVA
System power range	30–1500 kVA	
Nominal power per module	30 kVA / 40 kVA / 50 kVA	
Nominal power / frame	150 kVA	250 kVA
Number of UPS modules	1 to 3	1 to 5
Weight (with modules / without batteries)	368–379 kg	421–439 kg
Dimensions w × h × d	730 × 1975 × 800 mm	730 × 1975 × 800 mm
Output power factor	0.8	
Topology	Online double conversion	
Parallel configuration	Up to 30 modules	
UPS type	Modular (Decentralized Parallel Architecture)	
Input		
Nominal input voltage	3 × 380 / 220 V + N, 3 × 400 / 230 V + N, 3 × 415 / 240 V + N	
Voltage tolerance (referred to 3 × 400 / 230 V)	For loads <100% (–20%, +15%), <80% (–26%, +15%), <60% (–35%, +15%)	
Input distortion THDi	≤3%	
Frequency	30–70 Hz	
Power factor	0.99	
Output		
Rated output voltage	3 × 380 / 220 V + N, 3 × 400 / 230 V + N, 3 × 415 / 240 V + N	
Voltage distortion (referred to 3 × 400 / 230 V)	<2%	
Frequency	50 Hz or 60 Hz	
Overload capability	1 min.: up to 150% / 10 min.: up to 125%	
Unbalanced load	100% (all three phases regulated independently)	
Crest factor	3:1 (load supported)	
Efficiency		
Overall efficiency	Up to 95.5%	
In eco-mode configuration	98%	
Environment		
Storage temperature	–25 °C to +70 °C	
Operating temperature	0 °C to +40 °C	
Altitude	1000 m without derating	
Battery		
Battery capacity	Configurable up to several hours	
Internal batteries	Yes	–
No. of internal batteries	Up to 240 blocks 7/9 Ah	–
Communications		
LCD	Yes (per module)	
LEDs	LED for notification and alarm	
Communication ports	USB, RS-232, SNMP slot, potential-free contacts	
Standards		
Safety	IEC / EN 62040-1	
Electromagnetic compatibility (EMC)	IEC / EN 62040-2	
Performance	IEC / EN 62040-3	
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001	
Product certification	CE	
IP rating	IP 20	

DPA 250 S4

The world's most energy-lean UPS

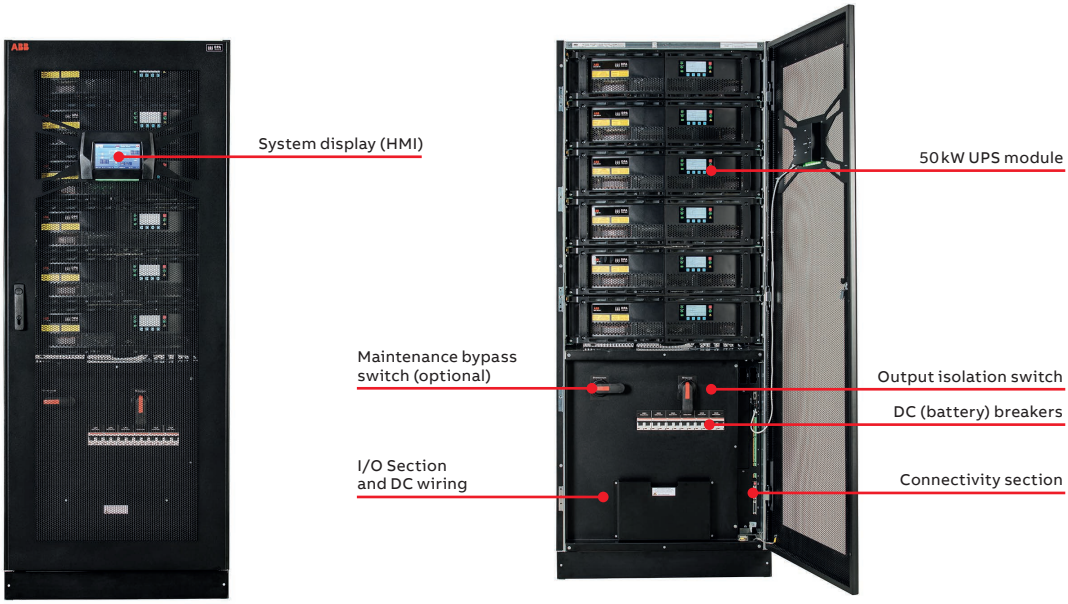

The DPA 250 S4 has a high-efficiency, modular architecture that offers best reliability for environmentally conscious organizations that also need zero downtime and low cost of ownership. The DPA 250 S4 is specially designed for critical, high-density computing environments such as small- to medium-sized data centers.

The DPA 250 S4 sets the standard for the next decade of UPS progress with advanced features such as its transformer-free IGBT converters that feature three-level topology with interleaving controls to enable market-leading efficiency of 97.6 percent for the UPS module. This high efficiency reduces operational costs and minimizes environmental impact.

High efficiency reduces total cost of ownership

- DPA 250 S4 can reduce energy losses by more than 30 percent compared to similar products in the market
- Thanks to three-level interleaved technology, the DPA 250 S4 achieves an energy efficiency of over 97 percent in a wide operating range
- Xtra VFI – double conversion mode maximizes efficiency under low-load conditions

Full flexibility to meet a variety of installation schemes

- Small installation footprint salves space (250 kW N+1 secured power in 0.75 m2)
- DPA 250 S4 is adaptable to different installation schemes
- Variety of options for energy backup. including lithium-ion batteries
- The DPA 250 S4's battery charger is very powerful, ready to support the critical load in the next outage

Uninterruptible power – scalable from 50 kW up to 1.5 MW

- 50 kW power in one UPS module
- 250 kW N+1 power in one UPS cabinet
- Up to six frames and up to 30 modules can be paralleled for an amazing 1,500 kW of uninterruptible power.
- Secure ring communication ensures there is no single point of failure in the system


Easy to operate – fast and secure to maintain

- A well-thought-out electrical and mechanical scheme reduces scope for human error and makes the fast and secure to maintain and service
- It takes only 10 minutes to extract a module, insert it back to the system and turn it back online
- DPA 250 S4 has a very robust design and features practical handles (e.g. mechanical stoppers to stop the modules from sliding out too far)
- Easy of monitoring at system and module level

DPA 250 S4
Product features

Energy saving in action
Featuring superior 97.6 percent UPS module efficiency and 97.4 percent system efficiency, the DPA 250 S4 reduces energy losses that create pure costs as direct electricity spend and costs for cooling. Thanks to three-level interleaved technology, the DPA 250 S4 achieves an efficiency of over 97 percent in a wide operating range, when the load is between 25 and 75 percent of nominal capacity.

DPA 250 S4
50 kW UPS module

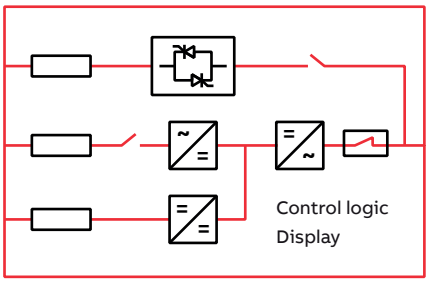


Fail-safe operation for high power applications
When multiple DPA 250 S4 cabinets are connected in parallel for capacities beyond 250 kW, secure ring communication ensures system reliability is maintained, and that there is no single point of failure.


The ring communication technique loops back the parallel communication cable from the last frame in the system. This introduces an alternative communication path in case one cable in between two frames is disconnected for some reason.


Xtra VFI – double conversion mode maximizes efficiency under low-load conditions
Under operating conditions where the load is low compared to UPS total capacity, the DPA 250 S4 can step up the system efficiency by optimizing the number of modules used in double conversion mode to feed the load. In case of a load step, more modules are switched automatically in milliseconds to online mode to secure the critical load.

Uninterruptible power – scalable from 50 kW up to 1.5 MW
A benefit of a modular UPS is that capacity can be easily scaled up or down. UPS system power can be optimized to match the load and upgraded easily if power demand increases. Featuring smart and secure power connectors, the DPA 250 modules can be removed, or added, while other UPS modules in the system support the load in double conversion mode.

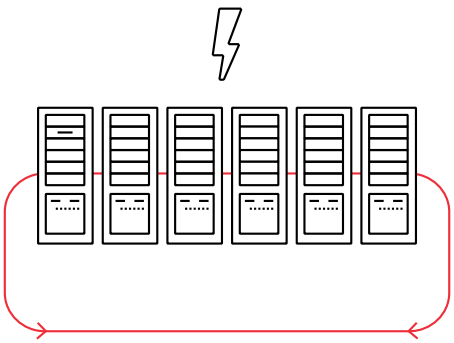

DPA 250 S4
Available models

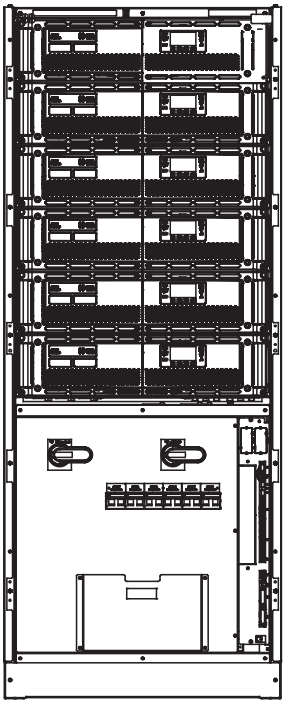

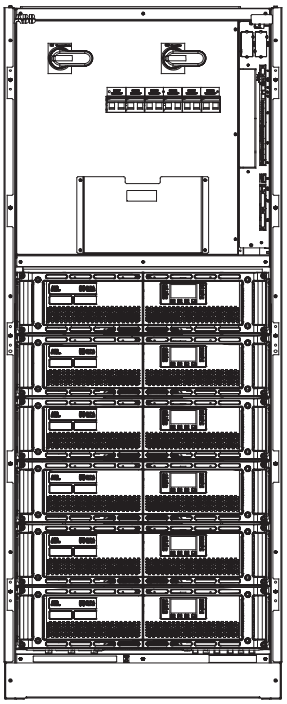

Cabinet type	250 kW N+1
Dimensions w × h × d	795 x 1978 x 943 mm
Capacity	Up to six modules
Weight module in kg	66
Weight in kg (without batt. /mod.)	270

UPS cabinet configuration
- UPS frame equipped with up to 6 x UPS module slots
- Top or bottom cable entry (standard)
- Single- and dual-input feed available
- Inbuilt output isolator
- Inbuilt back-feed protection
- Bypass fuses and battery circuit breaker for each module
- UPS module with HMI interface
- Communication interfaces: RS-232 and USB ports, I/O dry contacts (EPO, GEN On, …) and interface for external key interlock (bypass)


Options
- Manual bypass switch (one-frame applications)
- Graphical touch screen system display
- Elevation kit
- Control and monitoring (ModBus RS-485, ModBus TCP/IP, SNMP and others)
- Battery temperature sensor

DPA 250 S4
Technical specification

GENERAL DATA	
System power range	50 - 1,500 kW
Nominal power / module	50 kW
Nominal power / frame	250 kW (N+1)
Output power factor	1.0
Topology	Online double conversion, Decentralized Parallel Architecture
Number of UPS modules	5 + 1
Parallel configuration	Up to 30 modules
Cable entry	Top or bottom
Serviceability	Only frontal access needed
Back-feed protection	Built-in as standard
INPUT	
Nominal input voltage	380 / 400 / 415 VAC
Voltage tolerance (referred to 400 V)	- 30% at partial loads
Current distortion THDi	<3%
Frequency range	35 – 70 Hz
Power factor	0.99
Walk in / soft start	Yes
OUTPUT	
Rated output voltage	380 / 400 / 415 VAC
Voltage tolerance (referred to 400 V)	± 1.0%
Voltage distortion THDU	<2.0%
Frequency	50 or 60 Hz (selectable)
EFFICIENCY	
Module efficiency	Up to 97.6%
Overall system efficiency	Up to 97.4%
In eco-mode	Up to 99%
ENVIRONMENT	
Protection rating	IP 20 (IP 21 optional)
Storage temperature	-25°C to +70°C
Operating temperature	0°C to +40°C
Altitude (above sea level)	1,000 m w/o derating
BATTERIES	
Types	VRLA, open cells, NiCd and Li-Ion
COMMUNICATIONS	
User interface	System graphical display UPS Module HMI interface
Communication ports	USB, RS-232, potential-free contacts, SNMP (optional)
Customer interface	Remote shutdown, gen-set interface, external bypass contact
COMPLIANCY	
Safety	IEC / EN 62040-1
EMC	IEC / EN 62040-2
Performance	IEC / EN 62040-3
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001
DIMENSIONS	
Weight (without modules / without batteries)	270 kg
Weight module	66 kg
Dimensions w x h x d	795 x 1978 x 943 mm

Conceptpower DPA 500

The modular UPS for medium-sized and large data centers

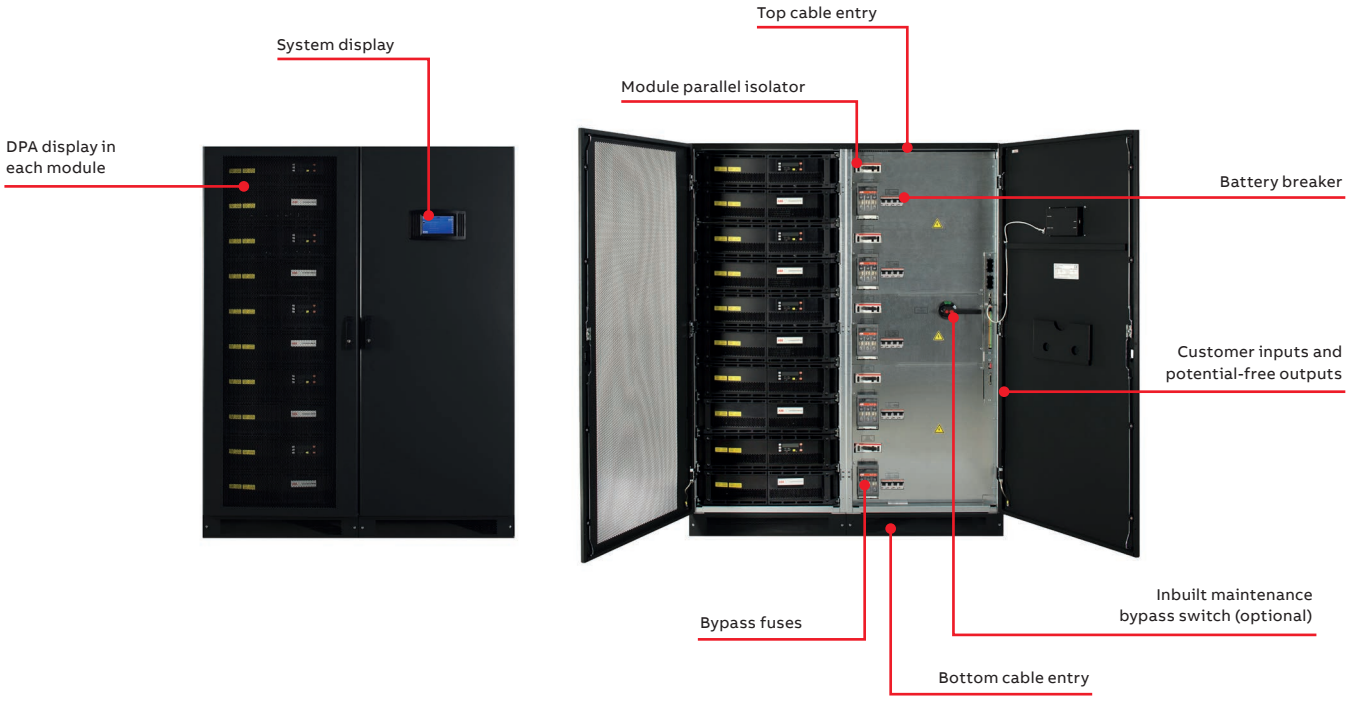

A data center with full uptime. That target is why ABB's Conceptpower DPA 500 is based on Decentralized Parallel Architecture (DPA). Only a truly redundant architecture like DPA allows online modules to be swapped out while the system is running. Each high-reliability, standardized module is self-contained and can be swapped at any time, so nothing has to be ever switched off – making routine maintenance safe and easy. And if you want to increase power, the UPS can be scaled vertically in 100 kW modular steps to provide up to 500 kW power in a single frame. Horizontal scalability is also given, with up to six frames in parallel, to increase total power up to 3 MW.

99.9999% (6 nines) availability
- Decentralized Parallel Architecture
- Replace or add modules with no downtime
- Short mean time to repair
- No single points of failure

Cost effective "right-sizing"
- Scalable up to 3 MW
- Vertical and horizontal scalability

Low total cost of ownership
- Up to 96% true online efficiency
- Eco-mode efficiency ≥99%
- Small footprint / high power density
- Unity power factor (kW = kVA)
- Low input harmonic distortion (THDi <3.5%)


Efficient service concept
- Simple power upgrade
- Fast maintenance
- Reduced spare parts needed
- Full front access

Conceptpower DPA 500
Product features


—
01 The power demand of one row of server racks can vary from 100 kW up to hundreds of kW. The building block concept of Conceptpower DPA 500 allows adaption to the changes in power demand in a growing infrastructure.
—
02 The sample reference scenario, 1200 kW Tier 4, illustrates one possible example of how the Conceptpower DPA 500 can be used to create a high-performance and flexible IT infrastructure. Extra modules can be added while the system is powered up to make it up to 3 MW.

Total vertical and horizontalscalability
The Conceptpower DPA 500 delivers power protection from 100 to 500 kW (one to five modules) in a single cabinet (vertical scalability). Cabinets can operate in a parallel configuration to build a system of up to 3 MW (horizontal scalabiltiy).

Designed with maximum flexibility at its core
The system flexibility allows upgrading or downgrading power capacity according to your needs.

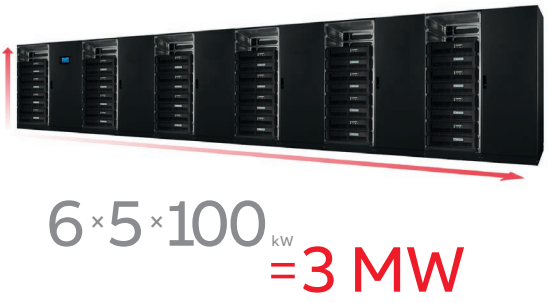


End of rack raw applications

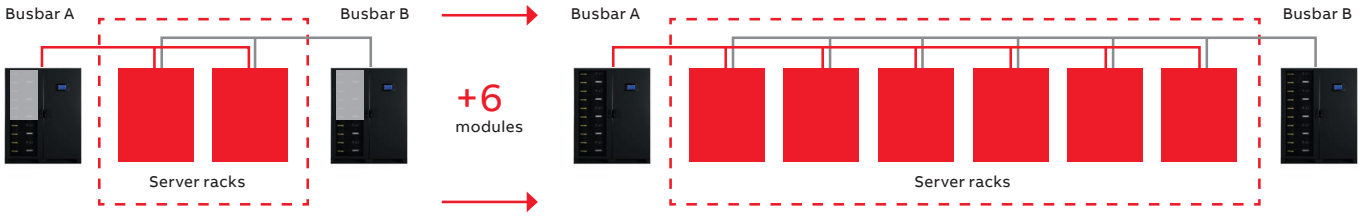


—
01

Dual-bus power protection solutions

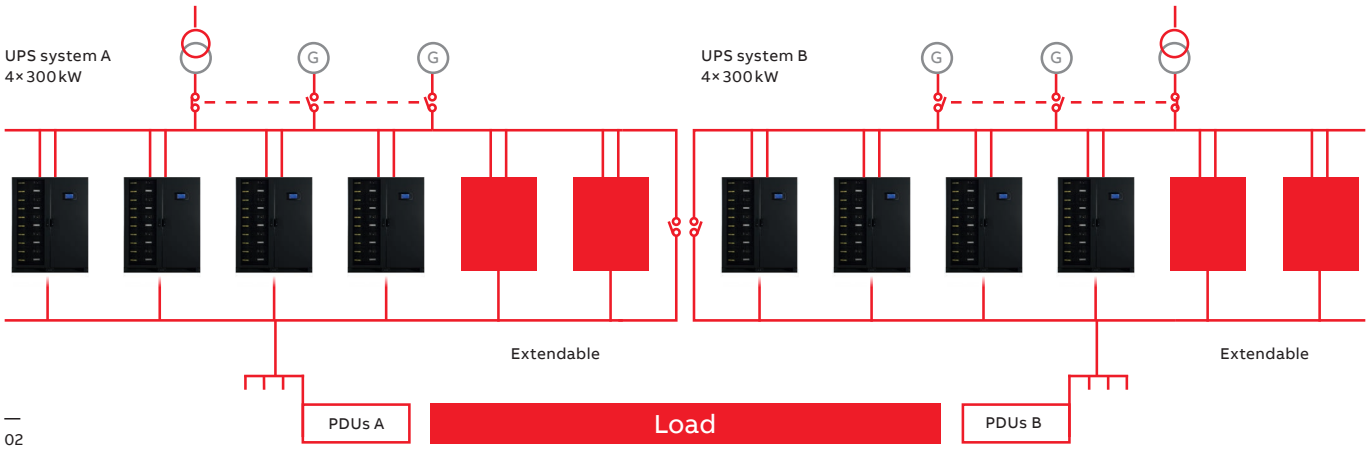

—
02

Conceptpower DPA 500
Available model

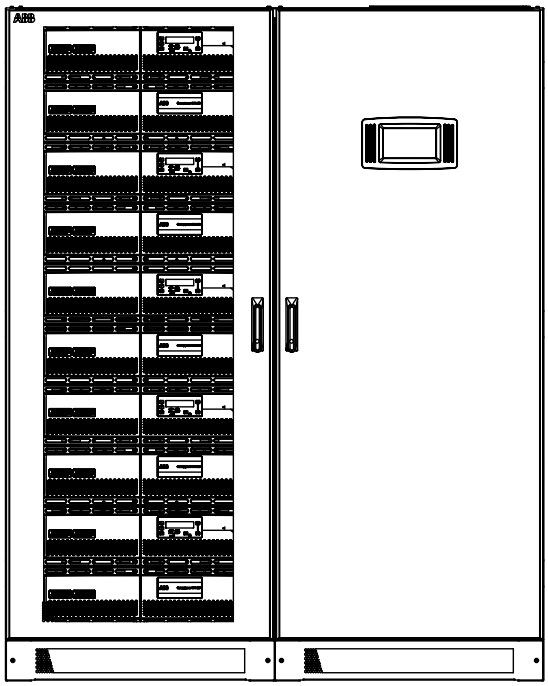

Cabinet type	DPA – 500 kW
Dimensions w × h × d	1580 × 1975 × 945 mm
Capacity	Up to five modules
Weight in kg	975 kg (500 kW system)


UPS cabinet configuration
- Online double conversion UPS
- Inbuilt module isolator
- Inbuilt back-feed protection
- Individual module display
- HMI interface with mimic diagram and LCD
- Top or bottom cable entry (standard)
- Single- and dual-input feed available
- Bypass fuses and battery circuit breaker for each module
- Graphical touch screen system display
- Communication interfaces: RS-232 and USB ports, I/O dry contacts (EPO, GEN On, …) and interface for external key interlock (bypass)

Options
- Manual bypass switch (one-frame applications)
- Control and monitoring (ModBus RS-485, ModBus TCP/IP, SNMP and others)
- Remote panel (graphical touch screen display)
- Battery temperature sensor
- Cold start
- Synchronization kit

Conceptpower DPA 500
Technical specification

General data	
System power range	100 kW–3 MW
Nominal power / module	100 kW
Nominal power / frame	500 kW
Output power factor	1.0
Topology	Online double conversion, Decentralized Parallel Architecture
Parallel configuration	Up to 5 modules in one cabinet (500 kW) / up to 6 cabinets in parallel (3 MW)
Cable entry	Bottom or top as standard
Serviceability	Full front
Back-feed protection	Built-in as standard
Input	
Nominal input voltage	3× 380 / 220 V + N, 3× 400 / 230 V + N, 3× 415 / 240 V + N
Voltage tolerance (referred to 400 / 230 V)	For loads <100% (–10%, +15%), <80% (–20%, +15%), <60% (–30%, +15%)
Input distortion THDi	<3.5%
Frequency range	35–70 Hz
Power factor	0.99
Walk in / soft start	Yes
Output	
Rated output voltage	3× 380 / 220 V + N, 3× 400 / 230 V + N, 3× 415 / 240 V + N
Voltage tolerance (referred to 400 / 230 V)	<±1% with static load / <±4% with step load
Voltage distortion	<2% with linear load / <4% with non linear load
Frequency	50 Hz or 60 Hz (selectable)
Efficiency	
Overall efficiency	Up to 96%
In eco-mode	≥99%
Environment	
Protection rating	IP 20
Storage temperature	–25 °C to +70 °C
Operating temperature	0 °C to +40 °C
Altitude (above sea level)	1000 m without derating
Batteries	
Types	VRLA / NiCd / Li-Ion
Battery charger	Decentralized charger per module
Communications	
User interface	Graphical touch screen (one per frame as standard) Decentralized LCD and mimic diagram (one per module as standard)
Communication ports	USB, RS-232, potential-free contacts, SNMP (optional)
Customer interface	Remote shutdown, gen-set interface, external bypass contact
Compliancy	
Safety	IEC / EN 62040-1
EMC	IEC / EN 62040-2
Performance	IEC / EN 62040-3
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001
Weight, dimensions	
Weight	975 kg (500 kW system)
Dimensions w × h × d	1580 × 1975 × 940 mm

PowerLine DPA 20–120 kVA
Full power for industrial applications

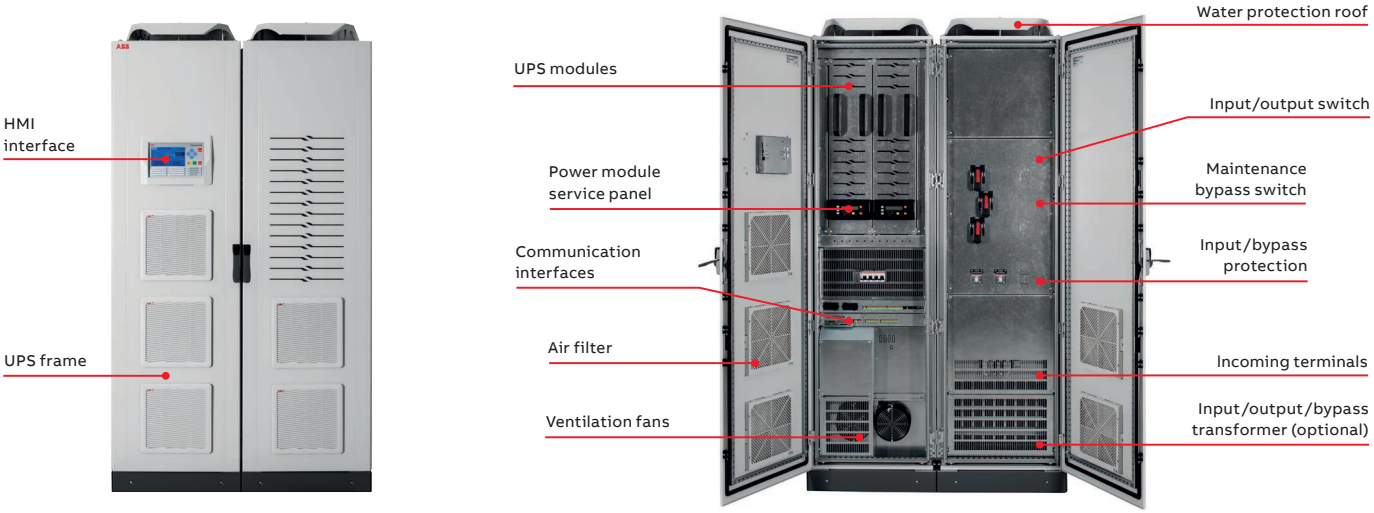

PowerLine DPA (3ph and 1ph) is an online double conversion UPS and makes the advantages of ABB's unique modular UPS architecture available for locations that are usually rough on electronic equipment. PowerLine DPA is based on ABB's Decentralized Parallel Architecture (DPA) that ensures the very best UPS design in terms of availability, serviceability, safety and ease of use.

Its robust design is suitable for industrial plant environments that have a variety of temperatures, dust, moisture and corrosive contaminants. The PowerLine DPA is designed to have a design life of 15 years. Its pre-configured options, tailored for industry, allow agile implementations with short lead times.

Fail safe electrical design
- High overload and short circuit capability
- System integrated galvanic isolation and step up-down voltage transformers (optional)
- High capacity for battery current charge for long battery banks

High availability
- Decentralized Parallel Architecture (DPA)
- Replace or add modules with no downtime (online swappable)

Fail safe mechanical design
- High degree of protection: IP31 (standard), IP42 (optional)
- Designed for deployment in demanding industrial situations
- Small foot print /high power density

Efficient service concept
- User-friendly operating interface
- Fast maintenance
- Full front access
- Reduced spare parts needed

PowerLine DPA
Product Features

—
01 Local control and metering are provided via a HMI (human-machine interface) consisting of graphical display showing the UPS mimic diagram, UPS operating status (normal, battery and bypass), and programmable alarms.

The robust UPS
PowerLine DPA's IP31-rated protection can easily cope with dust, water condensation, excessive humidity (up to 95 percent), corrosive air contamination and rough manhandling. The UPS is designed to operate in a temperature range of −5 to +45 °C. High priority has been given to safety and PowerLine DPA features a high degree of protection for users and maintenance staff. The device's compliance with the relevant standards – IEC/EN 62040-1 for general and safety aspects, IEC/EN 62040-2 for EMC and IEC/EN 62040-3 for performance and test – has been verified. All sort of transformers are available to meet customer voltage requirements and electrical isolation. In addition, PowerLine DPA has a high overload capacity and robust short-circuit capability, and is available with rated powers of 20 to 120 kVA. With input and output (three-phase) voltages in the range 220 to 415 VAC the UPS requires no onerous electrical installation considerations and is straightforward to service.




Monitoring
PowerLine DPA UPS can be supplied with relay boards and a network management card that provide connection to a DCS (distributed control system) or SCADA (supervisory control and data acquisition) system via SNMP, ModBus TCP or ModBus RS-485.
These interfaces allow:
- Environmental monitoring
- Extensive alarm handling and dispatching
- Redundant UPS monitoring
- Integration of PowerLine DPA into multivendor and multiplatform environments
- The supply of UPS data to Web applications

Battery bank
Most industrial processes will draw substantial amounts of power from a UPS. Therefore, PowerLine DPA is able to work with valve-regulated lead-acid (VRLA), NiCad and lithium-ion batteries to support autonomy times up to 10 h. Fast recharging is also catered for to get the UPS battery bank back up to operational levels as quickly as possible.

—
01



PowerLine DPA
Available models

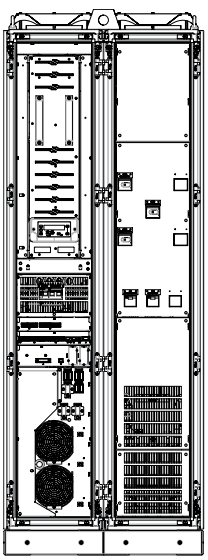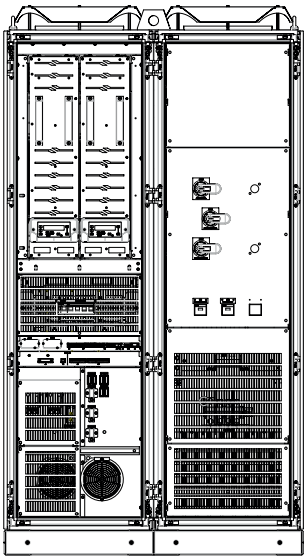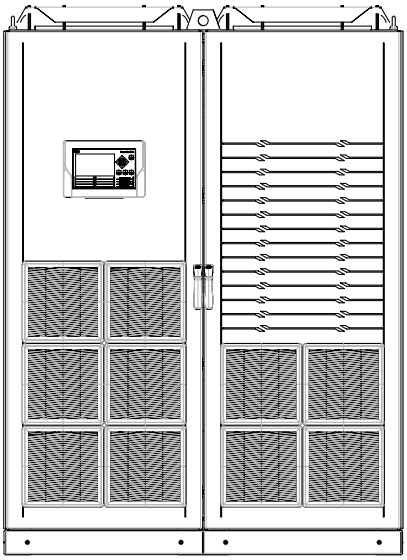Cabinet type	PowerLine DPA 40	PowerLine DPA 80	PowerLine DPA 120
Number of modules	1	2	3
Dimension w × h × d	800×2200×800 mm	1200×2200×800 mm	1600×2200×800 mm
Weight in kg (without transformers)	Up to 300 kg	Up to 500 kg	Up to 850 kg

UPS cabinet configuration
- 3ph and 1ph online double conversion UPS
- Decentralized Parallel Architecture
- Housed in an industrial metal enclosure, IP31, RAL 7035, bottom cable entry
- Halogen free cable
- Forced ventilation with monitored fans
- Input, bypass and battery protection
- Manual bypass switch
- Integrated back-feed protection
- HMI interface with graphical display, control push keys, UPS operating status indication and programmable alarm section
- Communication interfaces: Relay board with 9 programmable outputs and 8 inputs, RS-232 and USB ports

Options
- Input, output, bypass aluminum transformer
- Customized input & output voltages
- Ingress protection IP42
- Top cable entry
- Redundant fan monitoring (N + 1)
- Tropicalization and anti-corrosion protection for electrical boards
- Anti-condensator heater
- Lifting eyes
- Control and monitoring (ModBus RS-485, ModBus TCP/IP, SNMP)
- Battery temperature sensor
- Cold start
- Redundant configuration

PowerLine DPA
Technical specification

General data	PowerLine DPA 40		PowerLine DPA 80	PowerLine DPA 120
System power range	20 - 120 kVA (3ph); 20 - 80 kVA (1ph)			
Nominal power / frame	20 kVA	40 kVA	80 kVA	120 kVA
Number of UPS modules	1		2	3
Output power factor	1.0			
Topology	Online double conversion			
UPS configuration	Single, redundant, dual, N+1			
UPS type	Modular (Decentralized Parallel Architecture)			
Input				
Nominal input voltage	3×400/230 V + N			
Voltage tolerance (referred to 3×400 / 230 V)	For loads <100% (–15%, +10%), <80% (–20%, +10%), <60% (–25%, +10%)			
Input distortion THDi	≤4%			
Frequency	50 or 60 (selectable)			
Power factor	0.99			
Output				
Rated output voltage	3× 400/230 AV (3ph); 230 (1ph)			
Voltage distortion (referred o 3×400/230 V)	<1%			
Frequency	50 Hz or 60 Hz			
Overload capability	150% 1 min, 125% 10 min			
Output short capability	2.7 × Inom (3ph); 2.4 x Inom (1ph)			
Unbalanced load	100% (all three phases regulated independently)			
Crest factor	3:1 (load supported)			
Efficiency				
Overall efficiency / transformerless	Up to 96% (3ph); 94% (1ph)			
In eco-mode configuration	98%			
Environment				
Storage temperature	–25 °C to +70 °C			
Operating temperature	–5 °C to +45 °C			
Humidity	5% to 95% without condensation			
Altitude	1000 m without derating			
Electrical / Mechanical				
Degree of protection	IP31, IP42 (optional)			
Color	RAL 7035			
Cable entry	Bottom, Top (optional)			
Wiring	Halogen free cable			
Operating and maintenance access	Front access			
Ventilation	Forced ventilation with monitored fans			
Battery				
Battery type	VRLA / NiCd / Li-Ion			
Autonomy	According to customer's requirement			
Communications				
HMI	Graphical display for control and metering, 8 programmable alarm indications			
Relay contactors	8 in / 9 out programmable relays			
LCD	On system level HMI with graphical display and alarm indications; on module level service control interface			
LEDs	LED for notification and alarm			
Communication ports	USB, RS-232, SNMP slot, potential-free contacts			
Standards				
Safety	IEC / EN 62040-1			
Electromagnetic compatibility (EMC)	IEC / EN 62040-2			
Performance	IEC / EN 62040-3			
Product certification	CE			
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001			
Weight, dimensions				
Weight (with modules / without transformers)	Up to 300 kg		Up to 500 kg	Up to 850 kg
Dimensions w × h × d (mm)	800×2200×800 mm		1200×2200×800 mm	1600×2200×800 mm

PowerValue 11LI UP

A line-interactive UPS to suit all pockets



Intended for users with lower power requirements, the line-interactive PowerValue 11LI Up delivers from 600 up to 2,000 VA electrical power, making it the ideal UPS for modest IT applications. As well as intervening within 2 to 6 ms to power your application when mains power is lost, the PowerValue 11LI Up also filters out input power disturbances such as surges, line noise or brownouts. If the input power factor starts to play up, the PowerValue 11LI Up will automatically correct it.

This UPS solution has been created to make life easy for the user:

- An intuitive touchscreen display allows parameters to be read with the minimum of fuss.
- USB and RS232 interfaces give access to the outside world.
- Dedicated RJ11/RJ45 sockets protect connected telecoms devices.

The UPS's internal enhanced-runtime batteries are designed to give you stable, low-maintenance performance over many years of service. When they eventually have to be replaced, this can be done without opening the cabinet. The slot to access the batteries is located at the bottom. A comprehensive battery management suite and fan cooling ensure batteries are not overloaded and that they do not overcharge, discharge too deeply or overheat.

Enhanced runtime

- Up to four minutes autonomy with typical IT load
- High quality batteries ensure stable performance over years
- Minimize the costs related to battery maintenance and replacement

Compact size

- Small footprint
- Easy to place nearby a laptop or monitor


Easy battery replacement

- Change your battery in seconds
- Easy and safe access to the internal battery
- No need to dismantle the whole cabinet


Touchscreen LCD display

- All information in a tap
- More user friendly than a LED interface


PowerValue 11LI Up 600–2,000 VA
Available models

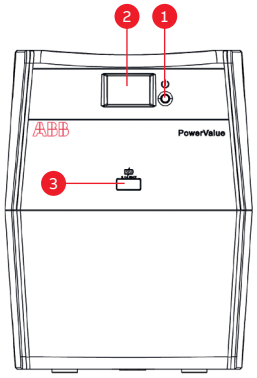

600-2000 VA
Front view

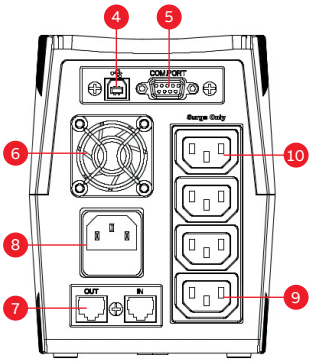

600-800 VA
Rear view

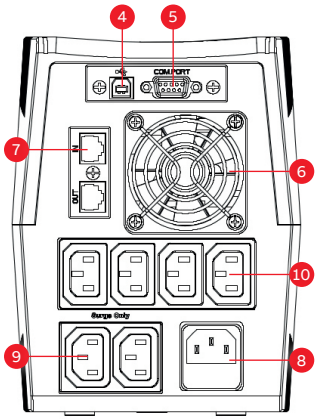

1000-1500-2000 VA
Rear view

1. Standby/line mode button and power LED	4. USB	7. RJ11/RJ45 data protection	10. Backup sockets
2. Touchscreen LCD display	5. RS232	8. AC input	
3. USB charger (5 V, 2 A)	6. Fan	9. Surge only sockets	

Technical specifications

	11LI Up 600VA	11LI Up 800VA	11LI Up 1000VA	11LI Up 1500VA	11LI Up 2000VA
Rated power	360 W	480 W	600 W	900 W	1200 W
Nominal AC input/ output voltage	230 VAC	230 VAC	230 VAC	230 VAC	230 VAC
AC input voltage window	170 – 280 VAC	170 – 280 VAC	170 – 280 VAC	170 – 280 VAC	170 – 280 VAC
AC output voltage tolerance	-17.1 % / +15.5% (line mode) ±10% (battery mode)	-17.1 % / +15.5% (line mode) ±10% (battery mode)	-17.1 % / +15.5% (line mode) ±10% (battery mode)	-17.1 % / +15.5% (line mode) ± 10% (battery mode)	-17.1 % / +15.5% (line mode) ± 10% (battery mode)
Input Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Output Frequency	50 Hz (60 Hz) ± 1 Hz	50 Hz (60 Hz) ± 1 Hz	50 Hz (60 Hz) ± 1 Hz	50 Hz (60 Hz) ± 1 Hz	50 Hz (60 Hz) ± 1 Hz
Efficiency	≥95%	≥95%	≥95%	≥95%	≥95%
Transfer time	2-6 ms	2-6 ms	2-6 ms	2-6 ms	2-6 ms
Battery type	1x7.2 Ah	1x8 Ah	2x7.2 Ah	2x8 Ah	2x8 Ah
Battery recharge time	6-8 hrs	6-8 hrs	6-8 hrs	6-8 hrs	6-8 hrs
Runtime in minutes at typical load (60%)	1’ 55’’	1’ 27’’	3’ 17’’	4’ 10’’	2’ 24’’
Ambient temperature	0-40°C	0-40°C	0-40°C	0-40°C	0-40°C
Max rel. humidity	0-90% not condensing	0-90% not condensing	0-90% not condensing	0-90% not condensing	0-90% not condensing
Storage temperature	-20 to 50°C	-20 to 50°C	-20 to 50°C	-20 to 50°C	-20 to 50°C
Net weight	4.1 kg	4.7 kg	7.5 kg	9.8 kg	10.7 kg
Dimensions (WxHxD)	122x160x315 mm	122x160x315 mm	145x190x335 mm	145x190x335 mm	145x190x335 mm

PowerValue 11LI Pro

A line-interactive UPS ideal for entry-level network equipment



Intended for entry-level network applications – such as server rooms in offices, network cabinets, workstation clusters, domestic networks, point-of-sale, network-attached data storage arrays and similar-sized situations – the line-interactive PowerValue 11LI Pro delivers from 600 up to 2,000 VA electrical power. This advanced protection ensures your connected equipment always sees a clean, regulated and reliable pure sinusoidal voltage.

This UPS solution has been created to make life easy for the user:

- An intuitive LCD display allows parameters to be read with the minimum of fuss.
- USB and RS232 interfaces give access to the outside world.
- Dedicated RJ11/RJ45 sockets protect connected telecoms devices.

The UPS's internal enhanced-runtime batteries are designed to give you stable, low-maintenance performance over many years of service. When they eventually have to be replaced, this can be done by opening only the front panel. A comprehensive battery management suite and fan cooling ensure batteries are not overloaded and that they do not overcharge, discharge too deeply or overheat.

ABB's design, technology and quality experience in high-end UPS engineering has been distilled into the line-interactive PowerValue 11LI Pro to produce a UPS that offers full protection and peace of mind for your moderately sized IT applications.

Enhanced runtime

- Up to six minutes with typical IT load
- High quality batteries ensure stable performance over years
- Minimize the costs related to battery maintenance and replacement

Compact size

- Small footprint
- Easy to place nearby a laptop or monitor, underneath a table or at the bottom of an IT rack


Easy battery replacement

- Change your battery in seconds
- Easy and safe access to the internal battery
- No need to dismantle the whole cabinet


Pure sinewave output

- Less harmonics content, lower fan speed and reduced acoustic noise
- Improved load performance and prolonged lifetime


PowerValue 11LI Pro 600–2,000 VA
Available models




600-800 VA
Front view

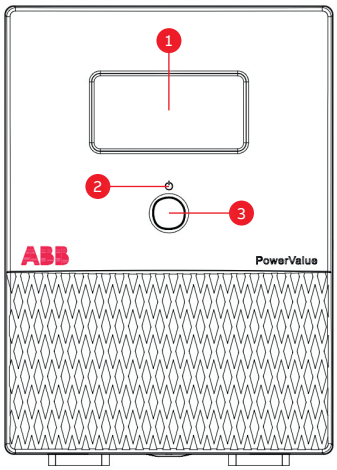

1000-1500- 2000 VA
Front view

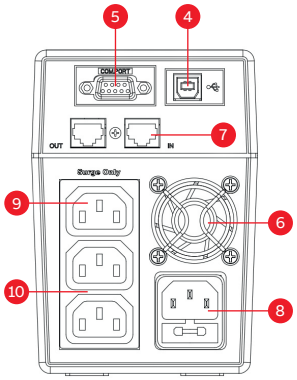

600-800 VA
Rear view

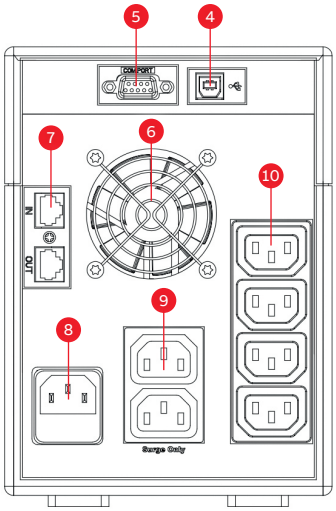

1000-1500- 2000 VA
Rear view

1. LCD display	4. USB	7. RJ11/RJ45 data protection	10. Backup sockets
2. Power LED	5. RS232	8. AC input	
3. On/off button	6. Fan	9. Surge only sockets	

Technical specifications

	11LI Pro 600VA	11LI Pro 800VA	11LI Pro 1000VA	11LI Pro 1500VA	11LI Pro 2000VA
Rated power	360 W	480 W	700 W	1050 W	1400 W
Nominal AC input/ output voltage	230 VAC	230 VAC	230 VAC	230 VAC	230 VAC
AC input voltage window	170 – 280 VAC	170 – 280 VAC	170 – 280 VAC	170 – 280 VAC	170 – 280 VAC
AC output voltage tolerance	-17.1 % / +15.5% (line mode) ±10% (battery mode)	-17.1 % / +15.5% (line mode) ±10% (battery mode)	-17.1 % / +15.5% (line mode) ±10% (battery mode)	-17.1 % / +15.5% (line mode) ±10% (battery mode)	-17.1 % / +15.5% (line mode) ±10% (battery mode)
Input Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz
Output Frequency	50 Hz (60 Hz) ± 1 Hz	50 Hz (60 Hz) ± 1 Hz	50 Hz (60 Hz) ± 1 Hz	50 Hz (60 Hz) ± 1 Hz	50 Hz (60 Hz) ± 1 Hz
Efficiency	≥95%	≥95%	≥95%	≥95%	≥95%
Transfer time	2-6 ms	2-6 ms	2-6 ms	2-6 ms	2-6 ms
Battery type	1x7.2 Ah	1x8 Ah	2x7.2 Ah	2x8 Ah	2x9.4 Ah
Battery recharge time	6-8 hrs	6-8 hrs	6-8 hrs	6-8 hrs	6-8 hrs
Runtime in minutes at typical load (60%)	3’30’’	2’30’’	5’ 51’’	5’ 08’’	3’ 01’’
Ambient temperature	0-40°C	0-40°C	0-40°C	0-40°C	0-40°C
Max rel.humidity	0-90% not condensing	0-90% not condensing	0-90% not condensing	0-90% not condensing	0-90% not condensing
Storage temperature	-20 to 50°C	-20 to 50°C	-20 to 50°C	-20 to 50°C	-20 to 50°C
Net weight	6 kg	6.6 kg	8 kg	11.1 kg	11.9 kg
Dimensions (WxHxD)	100x142x330 mm	100x142x330 mm	146x200x392 mm	146x200x392 mm	146x200x392 mm

PowerValue 11T G2

A cost-effective solution for maximum power protection



ABB's PowerValue 11T G2 is a single-phase in/out, double conversion online uninterruptible power supply (UPS) that guarantees up to 10 kW per single UPS of clean, reliable power for your critical single-phase applications. As well as maintaining power to your server room, advertising display, turnstiles, lab equipment, transportation signaling systems, ATM or vending machine, the PowerValue 11T G2 also conditions incoming power to eliminate spikes, swells, sags, noise and harmonics.

Featuring voltage and frequency independent (VFI) topology, the tower-only PowerValue 11T G2 saves costs by minimizing energy losses with its double conversion efficiency of up to 95 percent (up to 98% in ECO mode). Two or three units can be connected in parallel to boost power delivery to a maximum of 30 kW or to provide redundancy.

Simple to install or maintain, inexpensive to run and with the most compact online UPS footprint available on the market, the PowerValue 11T G2 provides stable, regulated, transient-free, pure sine wave AC power with extremely tight output voltage regulation. All units can be fitted with up to four external battery modules (EBMs) to extend runtime to well over two hours. Each EBM is dedicated to its corresponding UPS and setup is easily accomplished via the LCD menu.

High reliability
- Double conversion topology protects the load from all input disturbances
- Parallelable up to three units (6-10k only) to provide system redundancy
- User replaceable batteries
- Wide input voltage tolerance

Low cost of ownership
- Scalable runtime
- High operating efficiency
- Low installation and upgrading costs
- Compact design
- Output power factor of 1.0 (6-10 kVA only)

Flexible design
- Multiple connectivity options
- Each UPS can be connected with up to four parallel battery modules for extended runtime
- Adjustable DC voltage and battery charger current
- Extended backup time models available
- Best power density available in the market segment

Efficient service concept
- Integrated manually operated maintenance bypass switch (6-10 kVA only)
- Easy setup and maintenance (plug and play)
- User-friendly display
- Remote monitoring options

PowerValue 11T G2
Product features

The PowerValue 11T G2 with its cost-effective ABB UPS technology makes a high-performance and is now available to market sectors with lower power requirements: Small server rooms, critical lab or industrial equipment, security installations and applications of a similar power class can now profit from one of 12 PowerValue 11T G2 models.

With the most compact online UPS footprint available, the PowerValue 11T G2 features true on-line double conversion. This provides a flexible output frequency and isolates the UPS from upstream disturbances so that the critical load sees only stable, well-regulated, transient-free, pure sine wave AC power.

A rated output power factor up to 1.0 (kVA = kW) means the PowerValue 11T G2 delivers 11 percent more active power than a UPS with a power factor of 0.9. The UPS is optimized for modern IT loads and helps users reduce their energy budget with its double conversion efficiency of up to 95 percent (up to 98% in ECO mode).

- Low input line disturbances: input PF ≥ 0.995 @ 100 percent linear load – THDi < 3 percent
- Flexible configuration for scalable runtime: UPS and EBMs with and without batteries (long backup)
- Adjustable DC voltage and battery charger current
- Digital charger technology provides accurate charger current setting and reduces charger ripple current
- The UPS is delivered with an inbuilt parallel board and paralleling cables. No additional hardware is required for this installation.

All this with the same guaranteed high availability and quality standards as ABB's higher-power premium UPS models - and at the most attractive entry level price around.

UPS configuration

Standard
- Tower-type, IP20 UPS enclosure
- Single-phase in and out
- Online double conversion UPS
- Paralleling up to three units allows for increase of capacity to 30 kW or redundancy (6-10 kVA only)
- Operator and status LCD
- Wide voltage input frequency range
- Inbuilt batteries (B/B2 versions only)
- Maintenance bypass switch (6-10 kVA only)
- Plug-and-play


Options
- Additional battery cabinets (EBM) for scaling autonomy time
- SNMP, ModBus and AS400 interface cards for remote control and monitoring of the UPS via a web browser
- Sensors – combined with the network interface card, environmental humidity and temperature sensors can be integrated into the system and monitored remotely
- Connectivity functionality via Winpower SNMP (network management card), mini SNMP, ModBus, mini ModBus, EMP (environmental monitoring probe), AS400 and mini AS400

Battery runtime


Model	Internal batteries	EBM	UPS	UPS + 1 EBM	UPS + 2 EBM	UPS + 3 EBM	UPS + 4 EBM
G2 1 kVA B	1 x 2 x 9.4 Ah	3 x 2 x 9 Ah	5	23	52	85	120
G2 1 kVA S	No	3 x 2 x 9 Ah	-	17	48	70	100
G2 2 kVA B	1 x 4 x 9.4 Ah	3 x 4 x 9 Ah	5.5	25	55	90	125
G2 2 kVA S	No	3 x 4 x 9 Ah	-	18	50	80	110
G2 3 kVA B	1 x 6 x 9.4 Ah	2 x 6 x 9 Ah	5.5	16.5	35	55	80
G2 3 kVA S	No	2 x 6 x 9 Ah	-	10.5	28	50	70
G2 6 kVA B	1 x 16 x 7.2 Ah	2 x 16 x 9 Ah	4	18	41	68	99
G2 6 kVA B2	1 x 20 x 7.2 Ah	2 x 20 x 9 Ah	5.5	25	55.5	92.5	134
G2 6 kVA S	No	2 x 20 x 9 Ah	-	18	49	88	133
G2 10 kVA B	1 x 16 x 9 Ah	2 x 16 x 9 Ah	3	12	25	39	55.5
G2 10 kVA B2	1 x 20 x 9 Ah	2 x 20 x 9 Ah	4	17	34	53	75
G2 10 kVA S	No	2 x 20 x 9 Ah	-	9	24	42.5	64

in minutes at full load

PowerValue 11T G2
Available models

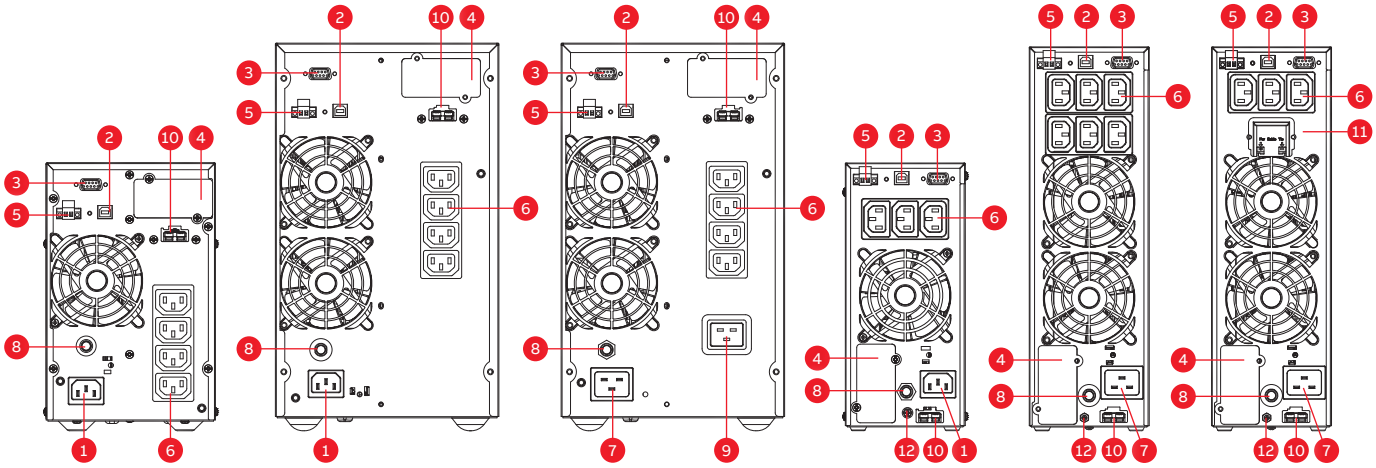

1. AC input 10 A	4. Mini SNMP/ Mini ModBus / Mini AS400	7. AC input 16 A	10. EBM connector
2. USB port	5. EPO / dry input	8. Output breaker	11. AC output 20 A
3. RS-232	6. AC output 10 A	9. AC output 16 A	12. GND contact

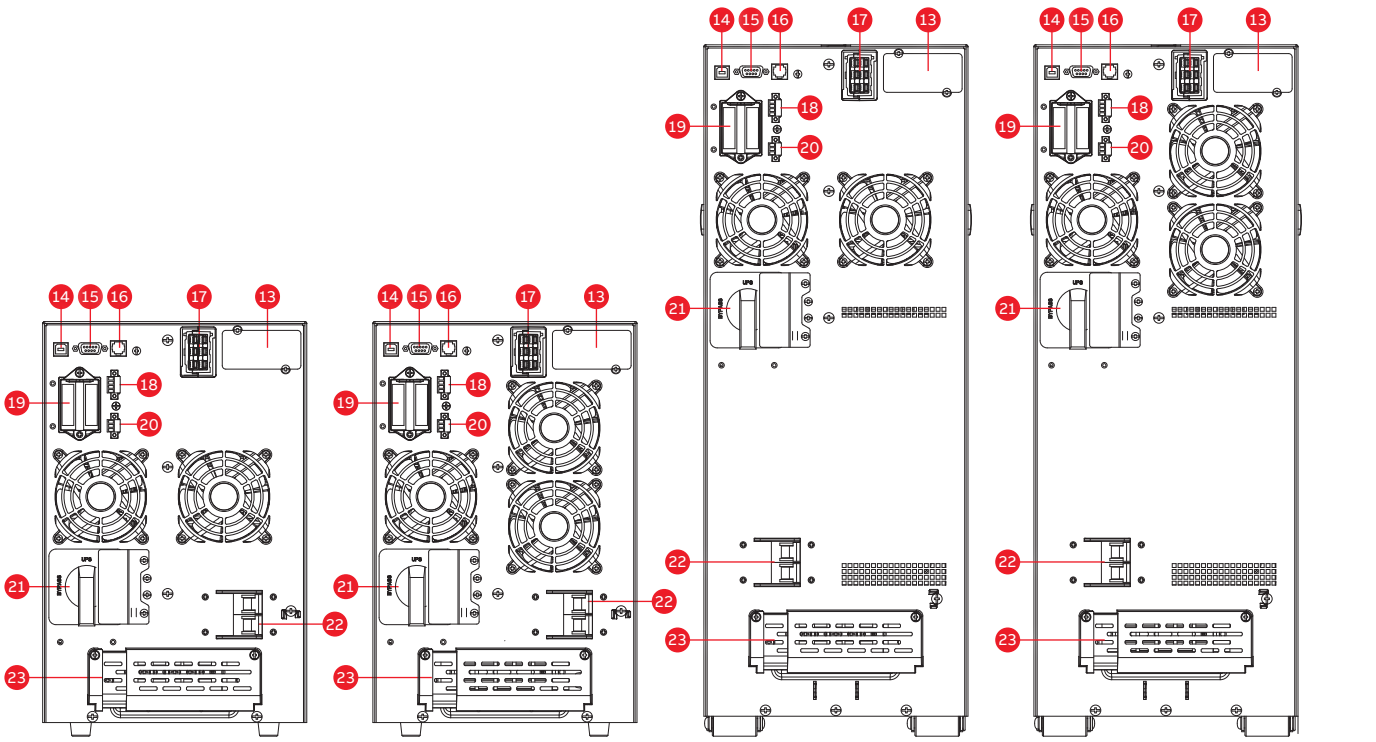

13. SNMP/ModBus/AS400	16. Reserved for future use	19. Parallel port	22. Input breaker
14. USB port	17. EBM connector	20. EPO	23. I/O terminals
15. RS-232	18. Dry in / out	21. MBP switch	

PowerValue 11T G2
Technical specifications

GENERAL DATA	G2 1kVA B/ S	G2 2kVA B/ S	G2 3kVA B/ S	G2 6kVA B/ B2 / S	G2 10kVA B/ B2 / S
Output rated power	900 W	1'800W	2'700W	6'000W	10'000W
Output power factor	0.9	0.9	0.9	1.0	1.0
Topology	Online double conversion				
Parallel configuration	No	No	No	Yes, up to 3 UPS	Yes, up to 3 UPS
Inbuilt batteries	Yes/No	Yes/No	Yes/No	Yes/Yes/No	Yes/Yes/No
INPUT					
Nominal input voltage	220/230/240 VAC			208/220/230/240 VAC	
Input voltage tolerance	100-300 VAC (load dependent)			100-276 (load dependent)	
Input current THDi	5% with full resistive load			<3% with full resistive load	
Frequency range	45-55 Hz / 54-66 Hz			45-55Hz / 54-66Hz (extendable to 40~70HZ at load < 60%)	
Power factor	≥0.99			≥0.995	
OUTPUT					
Rated output voltage	220/230/240 VAC			208/220/230/240 VAC	
Voltage tolerance	±1% (referred to 230V)				
Voltage distortion	<2% linear load, <6% non linear load			<1% linear load, <5% non linear load	
Overload capacity (linear load) on inverter	60s: 106-130% load 10s: 131-150% load 300ms: ≥ 150% load			10m: 102-125% load 30s: 126 to 150% load 500 ms: ≥ 150% load	
Nominal frequency	50 or 60 Hz				
Crest factor	3:1 (load supported)				
EFFICIENCY					
Overall system efficiency	Up to 89%	Up to 91%	Up to 91%	Up to 95%	
In eco-mode	Up to 97.5%	Up to 98%	Up to 98%	Up to 98%	
ENVIRONMENT					
Protection rating	IP20				
Storage temperature	UPS: -25°C to 60°C; Batteries: 0°C to 35°C				
Operating temperature	0°C to 40°C			0°-40°C (up to 50°C at 50% load)	
Relative humidity	0% to 95%				
Altitude (above see level)	1000m without derating				
BATTERIES					
Type	VRLA (valve regulated lead-acid)				
Inbuilt batteries	2x9.4 Ah (B)	4x9.4Ah(B)	6x9.4Ah(B)	16x9Ah(B) 20x9Ah (B2)	16x9Ah(B) 20x9Ah (B2)
Charging current	1.5A/3-6A adjustable	1.5A/1.5-6A adjustable	1.5A/1.5-6A adjustable	0-4A adjustable (B,B2) 0-12 adjustable (S)	
Recharge time (inbuilt batteries)	4h to 90%				
COMMUNICATIONS					
User interface	LCD display				
Optional communication cards	SNMP;ModBus;AS400;Environmental monitoring sensor probe				
STANDARDS					
Safety	IEC/EN 62040-1				
EMC	IEC/EN 62040-2				
Performance	IEC/EN 62040-3				
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS 18001				
WEIGHT, DIMENSIONS					
Weight	9.2/3.9 Kg	17.4/6.4 Kg	22.7/6.4 Kg	53/63/13 Kg	55.2/65.2/15.2 Kg
Dimensions w x h x d	144x228x356 mm 102x228x346mm	190x327x399 mm 102x327x390 mm	190x327x399 mm 102x327x390 mm	B / B2: 225 x 589x 452 mm S: 225x 348 x 452 mm	B / B2: 225 x 589x 452 mm S: 225x 348 x 452 mm

PowerValue 11 RT

The single-phase UPS for critical applications



ABB's PowerValue 11 RT is a double-conversion online UPS that guarantees up to 10 kVA of clean, reliable power for your critical single-phase applications. As well as maintaining power to your servers, point-of-sale terminals, workstation clusters, routers, switches, hubs and sensitive electronic equipment, the PowerValue 11 RT also conditions incoming power to eliminate spikes, swells, sags, noise and harmonics.

The PowerValue 11 RT can be used as a standalone UPS device or installed into a standard 19" rack configuration, with connectivity options available for each.

Three units of the 6 or 10 kVA models can be configured in parallel to provide redundancy or to increase the systems total capacity up to 30 kW. All units can be fitted with up to four battery modules to extend runtime.

High reliability
- Reliable double conversion topology protects load from all input disturbances
- Batteries can be added or replaced easily
- Reduced recovery time from discharge
- Redundant parallel operation available (6 and 10 kVA units)

Low cost of ownership
- Scalable runtime
- High operating efficiency, regardless of loading
- Reduced installation and upgrading costs
- Compact design


Flexible design
- Configurable in tower or rack-mount format
- Rotatable display
- UPS can be connected with up to four parallel battery modules for extended runtime
- Long backup models available
- Full set of accessories and connectivity options


Efficient service concept
- Manually operated maintenance bypass switch (optional)
- Easy set up and maintenance (plug and play)
- User-friendly display
- Hot swap user-replaceable batteries

PowerValue 11 RT
Product features


The advanced system architecture guarantees that the user is able to select a system to match their needs. Scalable runtime and the easy introduction of additional batteries make the solution sustainable.


In addition, three PowerValue 11 RT 6 or 10 kVA UPSs can be connected in parallel to increase total power or to add redundancy. The UPSs are delivered with an installed parallel board and paralleling cables. No additional hardware is required for a parallel installation.

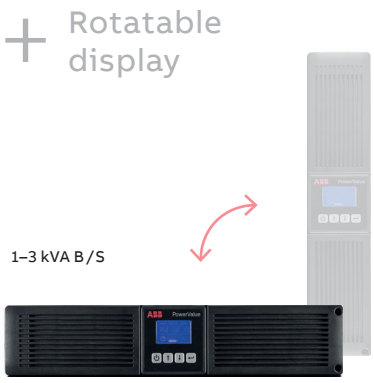

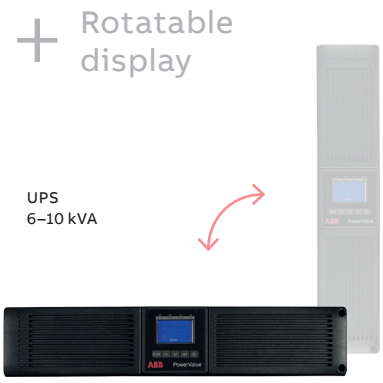

Scalable battery runtime

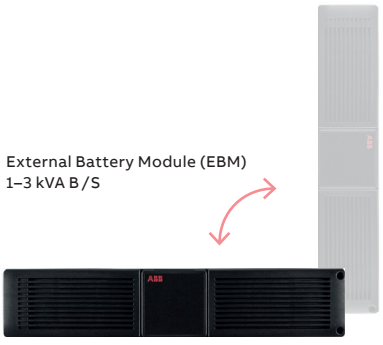

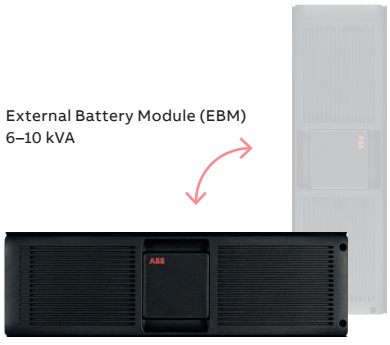


Battery runtime

Model	Internal batteries	EBM	UPS	UPS+1EBM	UPS+2EBM	UPS+3EBM	UPS+4EBM
1 kVA B	1 x 3 x 7.2 Ah	2 x 3 x 7.2 Ah	<4	16	32	52	68
1 kVA S	-	2 x 3 x 7.2 Ah	-	6	22	40	62
2 kVA B	1 x 4 x 9 Ah	2 x 4 x 7.2 Ah	4	12	22	32	45
2 kVA S	-	2 x 4 x 7.2 Ah	-	<5	11	22	34
3 kVA B	1 x 6 x 9 Ah	3 x 4 x 7.2 Ah	4	13	23	35	49
3 kVA S	-	3 x 4 x 7.2 Ah	-	<5	10	21	33
G2 6 kVA	-	1 x 20 x 9 Ah	-	7	18	33	49
G2 10 kVA	-	1 x 20 x 9 Ah		3	9	16	24


in minutes at full load

PowerValue 11 RT
Available models


1	AC input 10 A
2	Ground contact
3	USB port
4	RS-232
5	SNMP / AS400 slot
6	EPO / dry contact input port
7	Dry contact output port
8	AC output 10 A
9	AC input 16 A
10	AC input 20 A
11	AC output 16 A
12	EPO
13	Parallel port
14	Dry in / out
15	MBP connector
16	Output breaker
17	I/O terminals
18	Input breaker
19	EBM connector

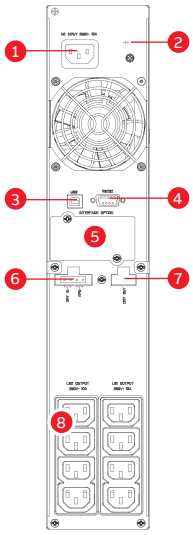


PowerValue 11 RT – 1–2 kVA B and 1 kVA S

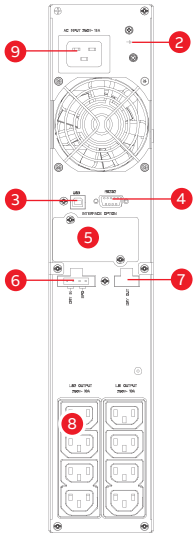


PowerValue 11 RT – 2 kVA S

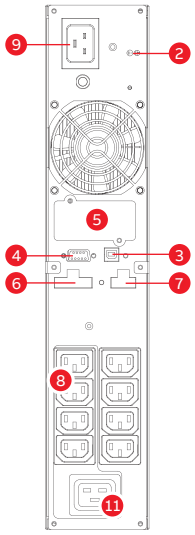

PowerValue 11 RT – 3 kVA B

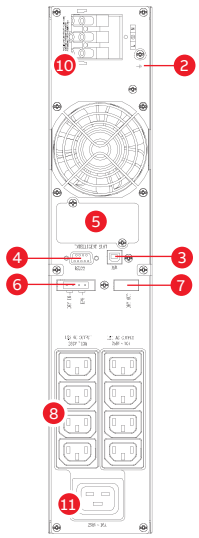

PowerValue 11 RT – 3 kVA S

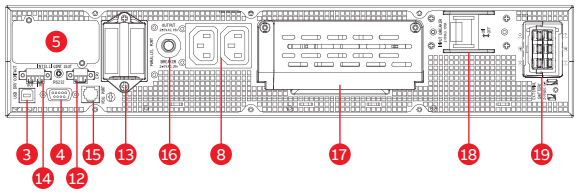

PowerValue 11 RT – 6 -10 kVA

Options

- Rack installation kit allows for easy mounting to standard 19'' rack
- Full range connectivity: SNMP, ModBus (RS-485 and TCP/IP), environmental monitoring probe, relay card with I/O contacts
- External maintenance bypass
- Automatic transfer switch (PowerValue 11RT 1-3 kVA)

UPS cabinet configuration


- Online double conversion UPS
- Efficiency in online mode up to 95%
- Efficiency in eco-mode up to 98%
- Configurable in tower format or rack-mount
- Three 6 kVA and 10 kVA UPSs (max 30 kW per system) can be connected in parallel for redundancy or extra capacity
- Cold start
- Frequency converter operation (50 Hz or 60 Hz)
- Interfaces: USB, RS-232, potential-free contacts, EPO contact inputs
- Emergency power-off for remote shutdown
- Load segmentation (for PowerValue 11RT 1-3 kVA)

PowerValue 11 RT
Technical specification

GENERAL DATA	1kVA B/ S	2kVA B/ S	3kVA B/ S	G2 6kVA	G2 10kVA
Output rated power	900 W	1'800W	2'400W	6'000W	10'000W
Output power factor	0.9	0.9	0.9	1.0	1.0
Topology	Online double conversion				
Parallel configuration	No	No	No	Yes, up to 3 UPS	Yes, up to 3 UPS
Inbuilt batteries	Yes/No	Yes/No	Yes/No	No	No
INPUT					
Nominal input voltage	208/220/230/240 VAC				
Input voltage tolerance	120-276 VAC (load dependent)			100-276 (load dependent)	
Input current THDi	<5% with full resistive load			<3% with full resistive load	
Frequency range	45-55 Hz / 54-66 Hz			45-55Hz / 54-66Hz (extendable to 40~70HZ at load < 60%)	
Power factor	≥0.99			≥0.995	
OUTPUT					
Rated output voltage	208/220/230/240 VAC				
Voltage tolerance	±1% (referred to 230V)				
Voltage distortion	≤2% linear load, ≤5% non linear load			<1% linear load, <5% non linear load	
Overload capacity (linear load) on inverter	12s: 102-129% load 1.5s: 130-150% load 100ms: ≥ 150% load			10m: 102-125% load 30s: 126 to 150% load 500 ms: ≥ 150% load	
Nominal frequency	50 or 60 Hz				
Crest factor	3:1 (load supported)				
EFFICIENCY					
Overall system efficiency	Up to 93%			Up to 95%	
In eco-mode	Up to 95%			Up to 98%	
ENVIRONMENT					
Protection rating	IP20				
Storage temperature	UPS: -25°C to 60°C; Batteries: 0°C to 35°C				
Operating temperature	0°C to 40°C				
Relative humidity	0% to 95%				
Altitude (above see level)	1000m without derating				
BATTERIES					
Type	VRLA (valve regulated lead-acid)				
Inbuilt batteries	3x7.2 Ah (B)	4x9Ah(B)	6x9Ah(B)	-	-
Charging current	1.5A/6A	1.5A/6A	1.5A/6A	0-12 A adjustable	
Recharge time (inbuilt batteries)	3h to 90%				
COMMUNICATIONS					
User interface	LCD display				
Optional communication cards	SNMP;ModBus;AS400;Environmental monitoring sensor probe				
STANDARDS					
Safety	IEC/EN 62040-1				
EMC	IEC/EN 62040-2				
Performance	IEC/EN 62040-3				
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS 18001				
WEIGHT, DIMENSIONS					
Weight	16.2/8.4 Kg	19.7/9.3 Kg	28.6/13 Kg	13.6 Kg	15.5 Kg
Dimensions w x h x d	438x86.5(2U) x436mm	438x86.5(2U) x436mm	438x86.5(2U) x608mm	438x86(2U) x573 mm	438x86(2U) x573 mm

PowerValue 11 / 31 T

The single-phase UPS for IT rooms, networks and other critical applications

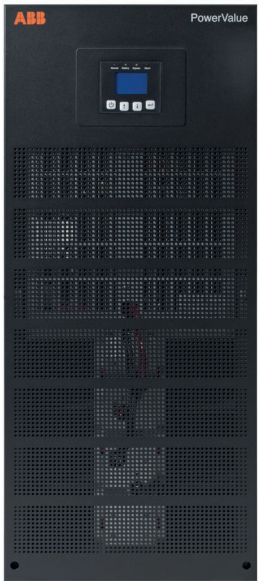

The PowerValue 11/31 T UPS delivers reliable power, low running costs, long battery life, easy maintenance and high levels of flexibility. Featuring double-conversion, voltage and frequency independent (VFI) topology, the PowerValue 11/31 T is available in both 10 and 20 kVA versions, with the option to configure up to four units in parallel to boost power capability or provide redundancy.

Three-phase or single-phase inputs can also be accommodated, as well as single- or dual-supply inputs – allowing the customer to manage two independent power sources. Simple to install and with a small footprint, the PowerValue 11/31 T provides stable, regulated, transientfree, pure sine wave AC power with extremely tight output voltage regulation.

High reliability
- Online double conversion topology
- Parallelable up to four units to provide system redundancy
- Programmed and automated battery tests ensure optimized battery management

Low cost of ownership
- Simple power increase by paralleling up to four units
- High operating efficiency, regardless of loading
- Reduced installation costs
- Compact design


Flexible design
- Different autonomy variations with inbuilt batteries or additional battery cabinets
- Long backup models available
- Single- or three-phase input – adaptable to installation requirements (field configurable)
- Single- or dual-input power source compatible (field configurable)
-

Efficient service concept
- Integrated manual bypass switch
- Easy to install and maintain
- User-friendly display
- User-replaceable batteries
- Remote monitoring and connectivity options

PowerValue 11 / 31 T
Product features

Compact power protection up to 80 kVA
PowerValue 11 / 31 T 10 and 20 kVA UPS can be installed in parallel to increase the total system power up to 80 kVA or to add redundancy to the system. The UPSs are delivered with an inbuilt parallel board and paralleling cables. No additional hardware is required for this installation.

PowerValue 11 / 31 T can be configured with up to two matching battery cabinets to satisfy extended runtime demands. Easily accessible and replaceable batteries increase availability and reduce mean time to repair (MTTR).

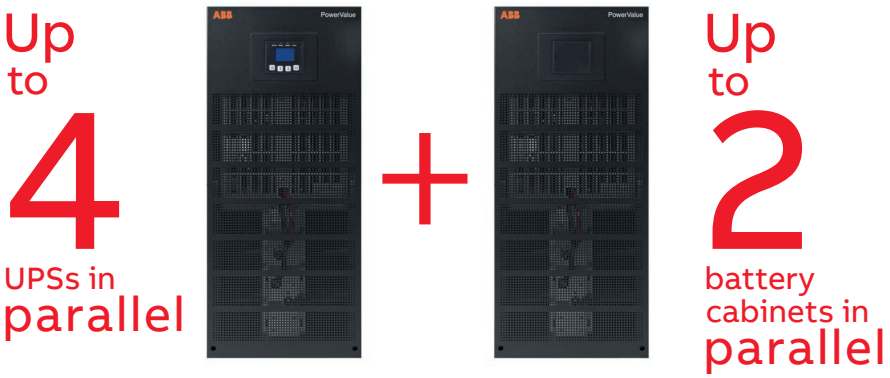

Battery runtime


Model	Internal batteries	EBM	UPS	UPS+1EBM	UPS+2EBM
10 kVA	-	4 x 24 x 9 Ah	-	30	69
10 kVA B	1 x 24 x 9 Ah	4 x 24 x 9 Ah	4	39	79
10 kVA B2	2 x 24 x 9 Ah	4 x 24 x 9 Ah	12	49	87
10 kVA S	-	4 x 24 x 9 Ah	-	30	69
20 kVA	-	4 x 24 x 9 Ah	-	12	29
20 kVA B	2 x 24 x 9 Ah	4 x 24 x 9 Ah	4	21	39
20 kVA S	-	4 x 24 x 9 Ah	-	12	29

in minutes at full load


Frequency conversion
Operating as a frequency converter, PowerValue 11 / 31 T not only converts the power supply frequency (50 Hz to / from 60 Hz), but it also protects the load from power disturbances and guarantees additional battery power in case of mains failure.

The operation and installation is simple and consisys merely of correctly wiring the UPS and selecting the frequency conversion mode in the LCD.
- Input frequency range: 40–70 Hz
- Output frequency: 50 Hz or 60 Hz
- Output derating:
  - Single-phase input: 60%
  - Three-phase input: no derating


PowerValue 11 / 31 T
Available models

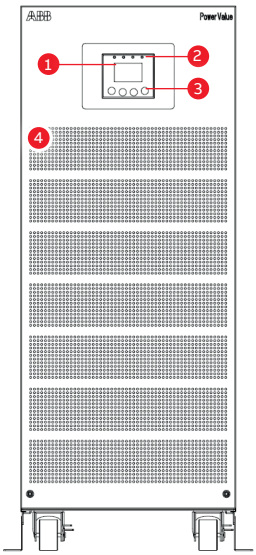


10 / 20 kVA

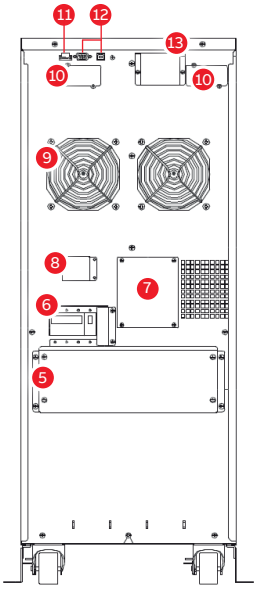

10 kVA

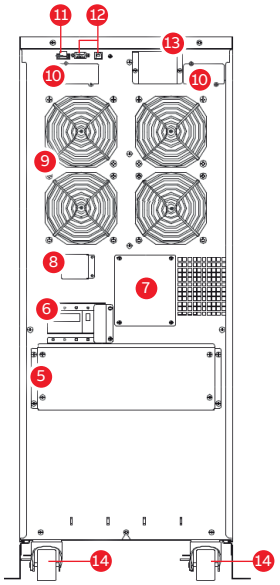

20 kVA

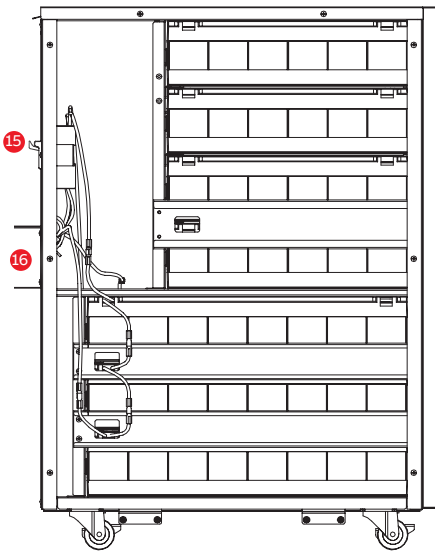

Battery cabinet (A and B)

1 LCD	**5** Connection terminals	**9** Fans	**13** Parallel port
2 LEDs	**6** Input breaker	**10** Network interface / AS400 slot	**14** Wheels / support and brakes
3 Control keys	**7** Manual bypass	**11** EPO contact	**15** Fuse holder
4 Ventilation inlets	**8** Back-feed protection terminals	**12** RS-232 port / USB port	**16** Battery connection terminals

UPS cabinet configuration

- Online double conversion UPS
- Efficiency in online mode up to 93.9%
- Efficiency in eco-mode up to 97%
- Paralleling up to four units allows for increase of capacity or redundancy
- Same model supports different wiring schemes
- Three-phase and single-phase input
- Single- and dual-input feed
- LCD
- Frequency converter operation (50 Hz or 60 Hz)
- Interfaces: USB, RS-232, ModBus, potential-free contacts, EPO contact inputs
- Emergency power-off for remote shutdown

Options


- Dry-contact card – relay interface card enables advanced communication between the UPS systems
- Network interface cards – control and monitoring of the UPS via a web browser
- Sensors – combined with the network interface card, humidity and temperature sensors can be integrated into the system and monitored remotely
- Additional battery cabinets that match perfectly with the UPS for scaling autonomy time

PowerValue 11 / 31 T
Technical specification

General data	10 kVA	10 kVA S	10 kVA B	10 kVA B2	20 kVA	20 kVA S	20 kVA B
Output rated power	9 kW				18 kW		
Output power factor	0.9						
Topology	Online double conversion						
Parallel configuration	Up to 4 units						
Inbuilt batteries	No	No	Yes	Yes	No	No	Yes
Input							
Nominal input voltage	1 ph + N: 220 / 230 / 240 VAC 3 ph + N: 380 / 400 / 415 VAC						
Input voltage tolerance	1 ph + N: 110–276 VAC 3 ph + N: 190–486 VAC						
Input current THDi	<5% linear load, <7% non linear load						
Frequency range	45–55 Hz for 50 Hz systems / 55–65 Hz for 60 Hz system						
Power factor	≥0.99						
Output							
Rated output voltage	220 / 230 / 240 VAC						
Voltage tolerance	±2%						
Voltage distortion	≤2% linear load, ≤5% non linear load						
Overload capability (linear load)	1 min: 110–130% / 5 min: 105–110% 100 ms: >150% / 10 s: 130–150%						
Nominal frequency	50 Hz or 60 Hz						
Crest factor	3:1 (load supported)						
Efficiency							
Overall efficiency	Up to 93.1%				Up to 93.9%		
In eco-mode	≥97%						
Environment							
Protection rating	IP 20						
Storage temperature	–15 °C to +60 °C for UPS, 0 °C to approx. +35 °C for battery						
Operating temperature	0 °C to +40 °C						
Relative humidity	0% to 95% (Non-condensing)						
Altitude (above sea level)	1000 m without derating						
Battery							
Type	VRLA (vented lead-acid)						
Inbuilt batteries	–	–	1 × 24	2 × 24	–	–	2 × 24
Battery capacity	–	–	9 Ah	9 Ah	–	–	9 Ah
Charging current	4 A	8 A	4 A	4 A	4 A	8 A	4 A
Recharge time	–	–	3 h to 90%	8 h to 90%	–	–	8 h to 90%
Communications							
User interface	LCD						
Communication cards (option)	Network interface (SNMP card), dry-contact card (AS400)						
Standards							
Safety	IEC / EN 62040-1						
EMC	IEC / EN 62040-2						
Performance	IEC / EN 62040-3						
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001						
Weight, dimensions							
Weight	56 kg	65 kg	116 kg	178 kg	67 kg	68 kg	190 kg
Dimensions w × h × d	350 × 890 × 715 mm	350 × 890 × 715 mm	350 × 890 × 715 mm	350 × 890 × 715 mm	350 × 890 × 715 mm	350 × 890 × 715 mm	350 × 890 × 715 mm

PowerScale

The three-phase UPS for low power applications

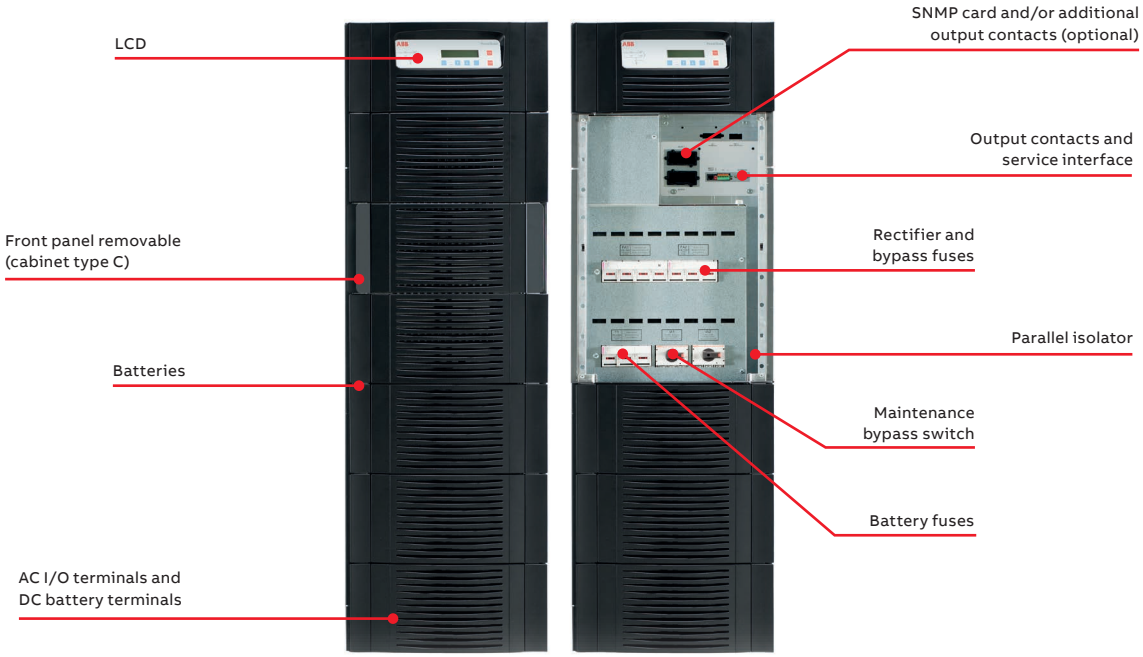

PowerScale is an online, double-conversion, VFI (voltage frequency independent) UPS that provides enhanced power protection in a compact format. Its outstanding price / performance delivers the best value for money in its category with uncompromised system reliability and power availability. PowerScale is available in three cabinet sizes, enabling you to choose the ideal capacity and required autonomy for your critical load.


High reliability
- Online double conversion technology
- Parallelable systems for increased redundancy

Low cost of ownership
- Scalable power and autonomy time
- Small footprint / high power density
- High efficiency at partial and rated loads (up to 95.5%)
- Reduced installation costs
- Ripple-free and temperature controlled battery chargers extend battery life time performance
- Low input harmonic distortion (THDi <3%)

Flexible design
- Available in seven power ratings and three cabinet sizes
- Parallel capacity up to 20 units
- External battery cabinets for extended autonomy

Efficient service concept
- Manually operated maintenance bypass switch
- User-friendly LCD
- Ergonomic design for easy serviceability
- Remote monitoring and connectivity options

PowerScale
Available models

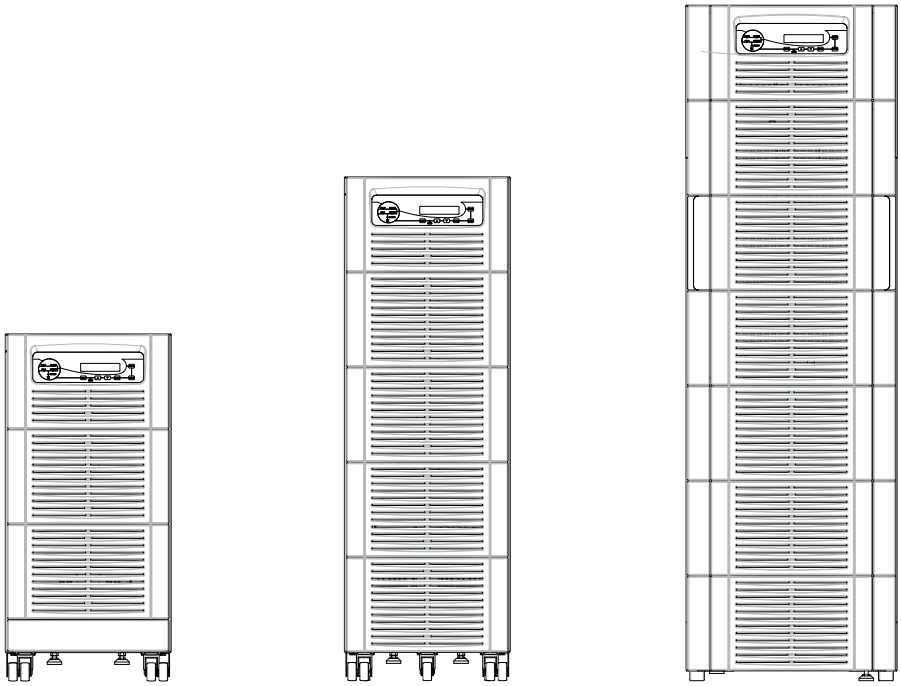

Cabinet type	Cabinet A: 10–20 kVA	Cabinet B: 10–25 kVA	Cabinet C: 25–50 kVA
Dimension w × h × d	345 × 720 × 710 mm	345 × 1045 × 710 mm	440 × 1400 × 910 mm
Internal battery capacity	Up to 48 blocks 7 / 9 Ah	Up to 96 blocks 7 / 9 Ah	Up to 144 blocks 7 / 9 Ah or 48 blocks 24 / 28 Ah

UPS cabinet configuration
- Online double conversion UPS
- Capacities from 10 kVA to 50 kVA in three different cabinet sizes
- Input, bypass and battery protection fuses
- Manual bypass switch
- Up to 95.5% efficiency across a wide load range
- Single- and dual-input feed available
- Communication interfaces: RS-232 and USB ports, I/O dry contacts (EPO, GEN On, …)
- Free space to place internal batteries

Options
- Integrated back-feed protection
- Parallel kit
- Cold start
- IP 21
- Halogen-free cabling
- Battery temperature sensor
- Communication interfaces: Relay card, ModBus RS-485, ModBus TCP/IP, SNMP
- Internal batteries
- External battery cabinets



ABB's uninterruptible power supplies are the stars of the UPS stage. No other UPS offers your critical processes such a low cost of ownership or fuss-free operation. The pioneers and leaders in large, modular UPS offer you easily scalable and easily maintained UPSs that give unparalleled uptime and energy efficiency.

PowerScale
Technical specifications

General data	10 kVA	15 kVA	20 kVA	25 kVA	30 kVA	40 kVA	50 kVA
Output power max.	9 kW	13.5 kW	18 kW	22.5 kW	27 kW	36 kW	45 kW
Output power factor	0.9						
Topology	Online double conversion						
Parallel configuration	Up to 20 units in parallel configuration						
UPS type	Standalone						
Inbuilt batteries	Yes						
Input							
Nominal input voltage	3× 380 V / 220 V + N, 3× 400 V / 230 V + N, 3× 415 V / 240 V + N						
Voltage tolerance (referred to ×400 V / 230 V)	For loads <100% (–10%, +15%), <80% (–20%, +15%), <60% (–30%, +15%)						
Input distortion THDi	≤3 at 100% (sine wave)						
Frequency	35–70 Hz						
Power factor	0.99 at 100% load						
Output							
Rated output voltage	3× 380 V / 220 V + N, 3× 400 V / 230 V + N, 3× 415 V / 240 V + N						
Voltage tolerance (referred to ×400 V / 230 V)	1% (static), 4% (dynamic)						
Voltage distortion	<2% linear load, <4% non linear load (IEC / EN62040-3)						
Frequency	50 Hz or 60 Hz						
Overload capability	5 min.:110 % or 20 sec.: 125 % (10 kVA - 25 kVA); 10 min.: 110 % or 1 min.: 125 % (30 kVA - 50 kVA)						
Unbalanced load	100% (all three phases regulated independently)						
Crest factor	3:1 (load supported)						
Efficiency							
Overall efficiency	Up to 95.5%						
In eco-mode configuration	98%						
Environment							
Storage temperature	–25 °C to +70 °C						
Operating temperature	0 °C to +40 °C						
Altitude	1000 m without derating						
Battery							
Battery type	7 Ah / 9 Ah / 28 Ah, sealed, lead-acid, maintenance-free						
Battery replacement	Field-replaceable						
Battery voltage	Flexible voltage for longer backup times						
Battery capacity	48 or 96 × 7 / 9 Ah	48 or 96 × 7 / 9 Ah	48 or 96 × 7 / 9 Ah	96 or 144 × 7 / 9 Ah	144 × 7 / 9 Ah or 48 × 28 Ah	144 × 7 / 9 Ah or 48 × 28 Ah	144 × 7 / 9 Ah or 48 × 28 Ah
Communications							
LCD	Yes (per module)						
LEDs	LED for notification and alarm						
Communication ports	RS-232, SNMP slot (USB and potential-free contacts optional)						
Standards							
Safety	IEC / EN 62040-1						
Electromagnetic compatibility (EMC)	IEC / EN 62040-2						
Performance	IEC / EN 62040-3						
Product certification	CE						
Protection rating	IP 20						
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001						
Weight, dimensions							
Cabinet type	A or B	A or B	A or B	B or C	C	C	C
Weight	60 or 88 kg	62 or 90 kg	64 or 92 kg	94 or 135 kg	145 kg	150 kg	155 kg
Dimensions w × h × d (mm)	345 × 720 × 710 or 345 × 1045 × 710	345 × 720 × 710 or 345 × 1045 × 710	345 × 720 × 710 or 345 × 1045 × 710	345 × 1045 × 710 or 440 × 1400 × 910	440 × 1400 × 910	440 × 1400 × 910	440 × 1400 × 910

PowerWave 33

Efficient power protection for today's IT and process-related work environments



PowerWave 33, an online double conversion UPS, delivers continuous power availability to network-critical infrastructures of both data centers and process control environments. Offering maximum power protection, the PowerWave 33 has a small footprint and uses less energy than comparable products – thus delivering significant savings.

The PowerWave 33 is available over a model range of 60 kW to 500 kW and can be configured to operate as a single, standalone UPS or as a multi-cabinet UPS system with up to ten UPS cabinets connected in parallel, achieving a total power capacity of up to 5 MW.

High reliability
- Online double conversion technology
- Parallelable systems for increased redundancy
- Extendable backup time
- Ripple-free and temperature controlled battery chargers extend battery life time performance

Low cost of ownership
- Up to 96% efficiency in double conversion across a wide load range
- Up to ≥99% efficiency in eco-mode
- Rated output power factor 1.0
- Near-unity input power factor at partial and full loads

Compact size
- Small footprint offers saving on expensive floor space
- Cooling air exhaust through the top of the cabinet – no rear cabinet clearance is required (only 60–120 kW and 400 to 500 kW units)

Efficient service concept
- Front access for serviceability and maintenance
- User-friendly LCD
- Remote monitoring and connectivity options

PowerWave 33
Product features


—
01 The PowerWave 33 is available in various configurations.
—
02 As your power requirements grow, the UPS system grows with them – thanks to its scalability – even in the most confined spaces.



60–120 kW | 160–200 kW | 250–300 kW | 400–500 kW

—
01

Easily scalable for capacity and redundancy

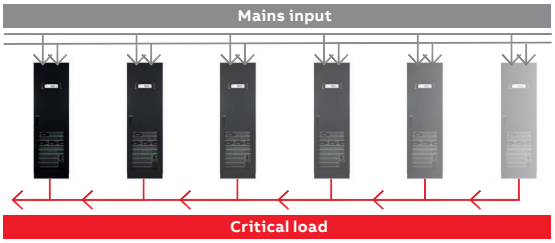

—
02

Up to 10 units can be configured in parallel to provide up to five megawatts of UPS power or redundant backup. This scalability means the UPS system capacity can be sized to match the load requirements, with the possibility to add incremental capacity later, when power needs change. The resulting savings in power usage over the service life of the UPS are substantial.

Space-saving and simple to service
Space-saving mechanical design results in a power density of up to 363 kW/m² and front-to-top airflow allows installation directly against a wall (60–120 kW and 400–500 kW units). For service, only frontal access is needed, which means that the total footprint with maintenance clearances is minimized.


Optionally a top cable entry enclosure may be used for the 400–500 kW UPS. This enclosure permits the connection of all incoming power cables from the top and extends the overall width of the UPS by 500 mm.

Well optimized for modern loads
A 1.0 rated output power factor means that each and every Watt of power is real power that is available for use. This helps with optimizing the complete electrical infrastructure in terms of switchgear and cabling, both upstream and downstream from the UPS.

Battery runtime can be optimized to match the exact needs. The UPS supports usage of 42–48 batteries (60–120 kW units) or 44–50 batteries (160–500 kW units) in a single string, which minimizes the total cost of installation as an optimal configuration can be used and so there is no need to oversize the battery.

Mains-friendly with low input harmonics and advanced PFC
This UPS's front-end rectifier actively controls the input power factor and has extremely low input current harmonic content. This means that no additional filters are required upstream and the UPS does not cause any disturbance to other equipment connected to the same input source. Unity input power factor and low harmonic distortion allows upstream cabling, switchgear and generator sizes to be optimized, and reduces heating of input transformers.

PowerWave 33
Available models

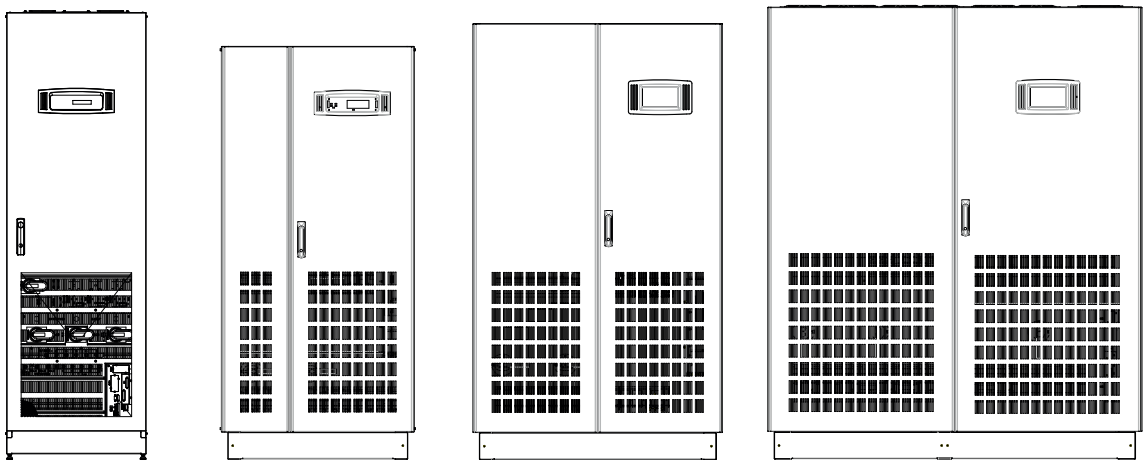

Cabinet type	**60–120kW**	**160–200kW**	**250–300kW**	**400–500kW**
Dimension w × h × d	615 × 1975 × 480mm	850 × 1820 × 750mm	1100 × 1920 × 750mm	1650 × 1994 × 850mm
Footprint	0.3m²	0.64m²	0.82m²	1.4m²

UPS cabinet configuration
- Online double conversion UPS
- HMI interface with mimic diagram and LCD (60–200kW)
- Graphical touch screen display (250–500kW units)
- Input, bypass and battery protection fuses
- Manual bypass switch (optional for the units 400–500kW)
- Single- and dual-input feed available
- Communication interfaces: RS-232 port and 5 input dry contacts (incl. EPO and GEN On)

Options
- Integrated back-feed protection
- Parallel system kit
- Synchronization kit
- Battery temperature sensor
- Remote panel (graphical touch screen display)
- Halogen-free cabling
- IP21
- Control and monitoring (relay card, ModBus RS-485, ModBus TCP/IP, SNMP)
- External battery cabinets
- Top cable entry enclosure (400–500kW units)

PowerWave 33 60–120 kW
Technical specification

General data	60 kW	80 kW	100 kW	120 kW
Output power max.	60 kW	80 kW	100 kW	120 kW
Output power factor	1.0			
Topology	Online double conversion			
Parallel configuration	Up to 10 units			
UPS type	Standalone			
Input				
Nominal input voltage	3× 380 / 220 VAC + N, 3× 400 / 230 VAC + N, 3× 415 / 240 VAC + N			
Voltage tolerance (referred to 3× 400 / 230 V)	For loads <100% (–10%, +15%), <80% (–20%, +15%), <60% (–30%, +15%)			
Input distortion THDi	≤4%			
Frequency	35–70 Hz			
Power factor	0.99			
Output				
Rated output voltage	3× 380 / 220 VAC + N, 3× 400 / 230 VAC + N, 3× 415 / 240 VAC + N			
Voltage distortion	<2%			
Frequency	50 Hz or 60 Hz			
Overload capability	0.5 min.: 150% load / 5 min.: 125% load / 20 min.: 110% load			
Unbalanced load	100% (all three phases regulated independently)			
Efficiency				
Double conversion	Up to 96%			
In eco-mode configuration	≥99%			
Environment				
Storage temperature	–25 °C to +70 °C			
Operating temperature	0 °C to +40 °C			
Altitude configuration	1000 m without derating			
Battery				
Battery type	Sealed, lead-acid, maintenance-free or NiCd			
Communications				
User interface	Optional			
Customer inputs	Remote shutdown, genset interface			
Customer outputs	Potential-free contacts (optional), USB (optional)			
Standards				
Safety	IEC / EN 62040-1			
Electromagnetic compatibility (EMC)	IEC / EN 62040-2			
Performance	IEC / EN 62040-3			
Product certification	CE			
Protection rating	IP 20			
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001			
Weight, dimensions				
Weight (without batteries)	198 kg	206 kg	228 kg	230 kg
Dimensions w × h × d	615 × 1954 × 480 mm or 615 × 1978 × 480 mm (with feet)			

Availability is everything when it comes to a UPS, so ABB's UPS architecture is designed to make sure that power is always available when you need it.



PowerWave 33 160–500 kW
Technical specification


General data	160 kW	200 kW	250 kW	300 kW	400 kW	500 kW
Output power max.	160 kW	200 kW	250 kW	300 kW	400 kW	500 kW
Output power factor	1.0					
Topology	Online double conversion					
Parallel configuration	Up to 10 units					
UPS type	Standalone					
Inbuilt batteries	Optional					
Input						
Nominal input voltage	3× 380 / 220 V + N, 3× 400 / 230 V + N, 3× 415 / 240 V + N					
Voltage tolerance (referred to 3× 400 / 230 V)	For loads <100% (–23%, +15%), <80% (–30%, +15%), <60% (–40%, +15%)					
Input distortion THDi	≤3.5%					
Frequency	35–70 Hz					
Power factor	0.99					
Output						
Rated output voltage	3× 380 / 220 V + N, 3× 400 / 230 V + N, 3× 415 / 240 V + N					
Voltage distortion	<2%					
Frequency	50 Hz or 60 Hz					
Overload capability	1 min.: 135% load / 10 min.: 110% load					
Unbalanced load	100% (all three phases regulated independently)					
Crest factor	3 : 1 (load supported)					
Efficiency						
Overall efficiency	Up to 96%					
In eco-mode configuration	98%					
Environment						
Storage temperature	–25 °C to +70 °C					
Operating temperature	0 °C to +40 °C					
Altitude configuration	1000 m without derating					
Battery						
Battery type	Sealed, lead-acid, maintenance-free or NiCd					
Communications						
Graphical display	Optional		Yes			
Standards						
Safety	IEC / EN 62040-1					
Electromagnetic compatibility (EMC)	IEC / EN 62040-2					
Performance	IEC / EN 62040-3					
Product certification	CE					
Protection rating	IP 20					
Manufacturing	ISO 9001:2015, ISO 14001:2015, OHSAS18001					
Weight, dimensions						
Weight (without batteries)	290 kg	310 kg	390 kg	410 kg	950 kg	1000 kg
Dimensions w × h × d	850 × 1820 × 750 mm		1100 × 1920 × 750 mm		1650 × 1994 × 850 mm	

Xtra VFI


Doube conversion mode maximizes efficiency under low-load conditions

Under operating conditions where the load is low compared to UPS total capacity, efficiency typically suffers and relative power losses are increased. Under these conditions, by using Xtra VFI – double conversion mode, ABB's DPA 250 S4 and Conceptpower DPA 500 can step up the system efficiency by optimizing the number of modules used in double conversion mode to feed the load. In case of a load step, more modules are switched automatically in milliseconds to online mode to secure the critical load.

The figure below shows how the Xtra VFI operating mode can enhance efficiency when running at a low load level for a DPA 250 S4 system.

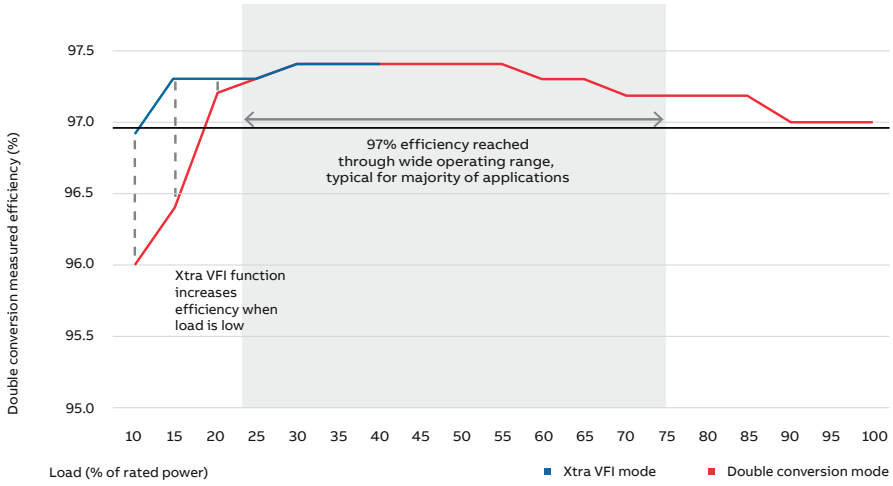

01 Superior double conversion efficiency helps to decrease costs of operation. The Xtra VFI feature boosts efficiency when the UPS operates with low load compared to nominal capacity.

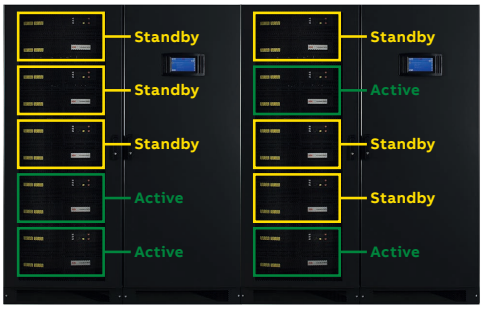

02 Conceptpower DPA 500 in Xtra VFI operating mode as reference example

Active
The UPS module is operating in double conversion mode and supplying the load with other active modules. Loading of the module is equal to full load divided by number of active modules.

Standby
The UPS module is on standby mode, ready to kick in and transfer to active double conversion mode in case needed. Response time for the module to transfer to active mode is in the range of milliseconds.

Control and metering via graphical interface
Xtra VFI has an interface that allows the user to set up operating parameters to suit the particular application.
Customer-configurable parameters include:

- How many redundant modules should be active at any time
- The highest expected load step (in kW or %).

This allows the system to further optimize the UPS performance and efficiency

The system calculates and displays Xtra VFI energy savings, etc. compared to normal operation:

- Instantaneous power (kW) currently being saved by the Xtra VFI mode
- The cumulative energy (kWh) saved from the day Xtra VFI mode was first enabled
- The number of modules in active mode and on standby
- A Xtra VFI preview in the display menu can be used to simulate how much power would be saved with different Xtra VFI setups

Tested and trusted
The test center at a glance

—
01 The modular infrastructure enables flexible testing of up to 4 MW.

—
02 Customers can monitor the entire test process from the comfort of the attached conference room, which has large windows that overlook the test bays. The teleconference and video sharing facilities allow customers who are further away to join in remotely.

Comprehensive testing is crucial. Therefore, companies usually test individual products before they leave the factory. However, out in the field, real life often throws up unexpected operating conditions once devices are assembled into a larger system.

That is why ABB has built a facility to test even the largest UPS configurations as one entity. The facility is designed to accommodate extended UPS systems – including, for example, energy storage such as battery banks, and input and output switchgear. ABB's test capabilities allow us to address trends toward bigger, more power-hungry data centers and industrial plants that require ever-larger UPS systems.

Full test capabilities:

- The modular infrastructure enables flexible testing of one 4 MW system or two smaller systems.
- The UPS can be tested together with associated equipment – such as switchgear, static transfer switches, transformers etc. – so the whole system can be quickly and smoothly integrated into the power infrastructure onsite.
- The test center can handle UPS systems for small- and medium-sized applications, as well as for power-hungry data centers and industrial plants.
- Different countries have different voltage standards – 208, 400, 480 VAC – and they can all be tested here.
- Customers and ABB engineers have a safe environment from which they can closely monitor the entire test process.
- As well as direct visual access, measurements from the test bays are displayed in the conference room.
- The facility is fully equipped with teleconference and video services to allow customer participation from anywhere on the planet.
- Around 90 percent of the power used in testing is recirculated. This massively reduces the electrical energy that is pulled from the public grid.

— 01



— 02




Battery cabinets and accessories
Extendable runtime

ABB offers a line of battery cabinets for its modular and standalone UPS series. These battery cabinets with integral overcurrent protection are compatible with a wide range of battery configurations and are optimized to meet application runtime needs.

The user may proceed as following to select the most appropriate battery cabinet and configuration:

1. Select UPS power and type
2. Choose common or separate battery configuration (in case of modular UPS)
3. Define backup time required
4. Select compatible and most appropriate battery cabinet
5. Calculate battery configuration using the ABB BAC autonomy calculator*

*Always verify the correct number of battery blocks according to the UPS model and battery cabinet specifications. Only even numbers of battery blocks are supported. 40 or 50 units per string are the most recommended configurations.

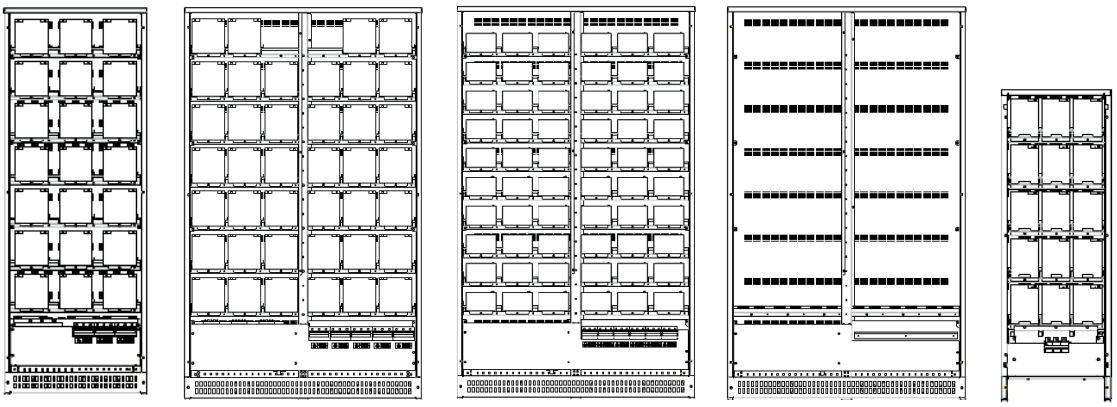

Available models

Type	CBAT -120	CBAT- 200	CBAT- 600 S	CBAT-FLEX	CBAT- 88

Battery cabinets
Technical specification

General data					
Type	CBAT -120	CBAT- 200	CBAT- 600 S	CBAT-FLEX	CBAT- 88
Version	CBAT- 120 S CBAT- 120 C	CBAT -200 S CBAT- 200 C	CBAT- 600 S	CBAT-FLEX	CBAT- 88
Battery arrangement: common/separate	Separate (S) Common (C)	Separate (S) Common (C)	Separate (S)	Not applicable	Common (C)
Compatible UPS types	Conceptpower DPA 150 kVA Conceptpower DPA 250 kVA DPA UPScale ST 80 DPA UPScale ST 120 PowerWave 33 S2 160kW (only common)	Conceptpower DPA 150 kVA Conceptpower DPA 250 kVA DPA UPScale ST 80 DPA UPScale ST 120 DPA UPScale ST 200 PowerWave 33 S2 160kW (only common) PowerWave 33 S2 200kW (only common) PowerWave 33 S2 250kW (only common) PowerWave 33 S2 300kW (only common)	DPA UPScale ST 120	Conceptpower DPA 150 kVA Conceptpower DPA 250 kVA DPA UPScale ST 80 DPA UPScale ST 120 DPA UPScale ST 200 PowerWave 33 S2 160kW (only common) PowerWave 33 S2 200kW (only common) PowerWave 33 S2 250kW (only common) PowerWave 33 S2 300kW (only common)	PowerScale 25kVA Cab C* PowerScale 30kVA Cab C* PowerScale 40kVA Cab C* PowerScale 50kVA Cab C*
Max number of UPS modules (applies only to separate batt. configurations)	3	5	6	-	-
Battery					
VRLA battery type	24/28Ah	24/28Ah	7/9Ah	Not Available	24/28Ah
Battery dimensions w x h x d	166 x 175 x 125 mm	166 x 175 x 125 mm	151 x 100 x 65 mm	Depends on batt. type	166 x 175 x 125 mm
Maximum number of battery blocks	120	200	600	Depends on batt. type	88
Number of batteries per string (only even)	30 – 50	30 –50	30 – 50	Depends on batt. type	20 - 44
Maximum number of battery strings	3	5	12	Depends on batt. type	2
Battery placement	On trays	On trays	On trays	On shelves	On trays
Battery per tray	5	5	10	Depends on batt. type	5
Number of trays	24	40	60	Not Applicable	18
Electrical characteristics and wiring connection					
Nominal DC voltage	360–600V	360–600V	360–600V	Not applicable	240–528V
DC fuse	9×100A	15×100A	18×50A	Not available	3 ×100A
Wiring terminal type	S type: Terminals C type: Busbar	S type: Terminals C type: Busbar	Terminals	Not available	Terminals
Wiring terminals	S type: 3 x 3 x 50mm2 + PE 1 x (2 x M8) C type : 3 x (2 x M8) + PE 1 x (2 x M8)	S type: 3 x 5 x 50mm2 + PE 1 x (2 x M8) C type : 3 x (4 x M10) + PE 1 x (2xM8)	S type: 3 x 6 x 35mm2 + PE 1 x (2 x M8)	Not included	3 x 25mm2 + PE 1 x 25 mm2
Physical characteristics					
Dimensions w x h x d	730×1975×796mm	1200×1975×796mm	1200×1975×796mm	1200×1975×796mm	475×1400×940mm
Weight with trays w/o batteries	280 kg	390 kg	450 kg	w/o trays 190kg; weight of one shelf 15kg	140 kg
Weight with trays and batteries	Approx. 1480 kg	Approx. 2390 kg	Approx. 2010 kg	Depends on batt. type	Approx. 1040 kg
Feet	4 feet of 12,5 cm2 each	6 feet of 12,5 cm2 each	6 feet of 12,5 cm2 each	6 feet of 12,5 cm2 each	4 feet of 12,5 cm2 each
Color	RAL 9005 - black	RAL 9005 - black	RAL 9005 - black	RAL 9005 - black	RAL 9005 - black
Options					
Cables (UPS to batt.cabinet)	4 m length, 10-150mm2	4 m length, 10-150mm^2	4 m length, 10 mm^2	Not available	4 m length, 25mm2

* Only if no internal batteries




When you want power protection for a data center, production line or any other type of critical process, lithium-ion battery solutions provide peace of mind and the performance you need.

Lithium-ion battery system for ABB UPS solutions

Overview of ABB lithium-ion battery system
Lithium-ion battery system employs the very latest in battery technology and directly addresses the two top concerns of critical power users: availability and total cost of ownership. The system is a perfect fit for a wide range of ABB's UPS solutions. Working together, an ABB UPS and lithium-ion battery system provides users with the peace of mind that their applications are protected by the very best in power protection technology and they can be assured a constant flow of clean power.

The ABB lithium-ion battery solution is accommodated in a standard 19" cabinet. All connectors are front-facing for ease of installation, maintenance and replacement. A single cabinet configuration of 34.6 kWh comprises a switchgear element, a switched-mode power supply (SMPS) and 17 battery modules. Each module contains eight series-connected 67 Ah, 3.8 V cells and a dedicated battery management system (BMS) with cell balancing functionality. The switchgear collects all information about each battery cell, calculating the state of charge (SoC) and state of health (SoH). The SMPS supplies the power for the BMS and communicates with the UPS and other connected cabinets. Battery cabinets are compact, thus saving real estate and increasing power density, and may be connected in parallel to achieve the power needed.

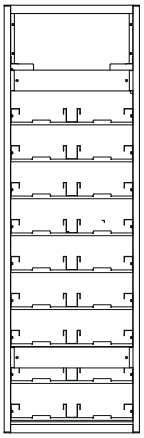

UPS lithium-ion battery system

Technical specification

General data	
Nominal energy (kWh)	34.6
Capacity (Ah)	67
Open circuit voltage (V)	516.8
Operating voltage (V)	435V / 571.2
Charging current (A)	22
Operating temperature (°C)	18–28
Maximum discharge current (A)	470A (60 sec) 600 (1 sec)
Procuct compatibility	
DPA 250 S4	Yes
Conceptpower DPA 500 400 V IEC	Yes
PowerLine DPA	Yes
Batteries	
Type	Li-Ion
Weight	
Weight with batteries	550 kg
Dimensions	
Dimensions w × h × d	650 x 2055 x 600 mm

Connectivity solutions

Smart power monitoring for single or multiple systems


ABB offers intelligent solutions that monitor the status of your power system and thus ensure your data storage equipment or control process continues to receive clean, reliable power. The monitoring devices provide real-time visibility of the condition of your power equipment and help in identify problematic trends before they become critical.

Power and environmental monitoring
Network interface cards connect ABB's UPS systems to the network. These cards also provide the ability to connect several environmental sensors to the UPS. This combination allows for a clear visual representation on a web interface of not only the UPS system but also its environment.

Management software
The network interface cards are provided with extensively configurable software that provide access to measurement values and to the UPS's status information. The status of each UPS cabinet, UPS module or the entire system can be presented on a separate mimic diagram. These diagrams provide users with clear, real-time information. During normal operation, records of all events are kept in a log file. In case of a power failure, battery autonomy is monitored and network shutdown of the protected devices is initiated.

Data protection
The remote shutdown software manages a particular workstation, network or servers. Shutdown or reboot can be executed safely.

In addition, text messages, e-mails, pop-ups and mobile messages can be dispatched or displayed before the devices are shut down – giving the user the flexibility to manage or cancel the operation.

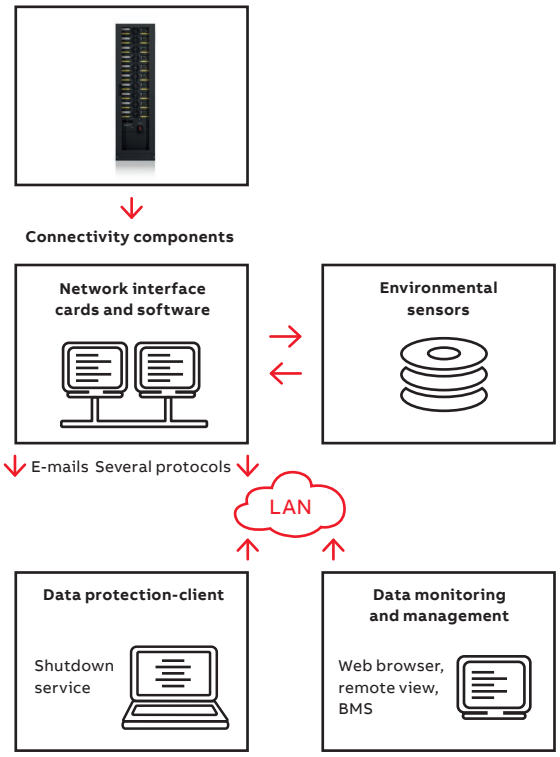


Highlights
- Remote monitoring via web
- Environmental monitoring
- Extensive alarm handling and dispatching
- Redundant UPS monitoring
- Integration into network or building management system
- Integration into multivendor and multiplatform environments
- ModBus interface
- Multiple standard protocols are supported

Applications
- Personal computers
- Servers and network devices
- Data centers
- Storage systems
- Industrial automation
- Power systems

Connectivity solutions
Network interface cards


ABB offers several network interface options to suit all the customers' needs:



Slot format

CS141 Basic
For interfacing the UPS with the network without the need for additional sensors or interfaces. Available in slot and box formats.

Supports the following protocols			
1	HTTP	4	ModBus TCP
2	SNMP	5	Telnet FPT
3	SMTP (e-mail)		



Slot format

CS141 Advanced
For interfacing UPS with the network and allowing users to connect additional sensors and I/O options either directly to the card or via sensor manager. Available in slot and box formats.

Supports the following protocols			
1	HTTP	4	ModBus TCP
2	SNMP	5	Telnet FPT
3	SMTP (e-mail)	6	ModBus RS-232



Box format

CS141 ModBus
For interfacing UPS with the network and the ModBus RS-485 with option to connect alarms buzzers or additional relay board. Available in slot and box formats.

Supports the following protocols			
1	HTTP	4	ModBus TCP
2	SNMP	5	Telnet FPT
3	SMTP (e-mail)	6	ModBus RS-485



Slot format

USHA+
For interfacing UPS with the network with an option to connect additional environmental sensors. Available in slot format only.

Supports the following protocols			
1	HTTP	4	ModBus TCP
2	SNMP	5	Telnet FPT
3	SMTP (e-mail)		

Slot cards are UPS powered, while cards in box format require external power.

Connectivity solutions
Monitoring for single or multiple systems


List of connectivity and sensor options for different network interfaces

CS141	Network interface*	Box	CS141 Basic	Web / SNMP interface ModBus TCP	No sensor options	Sensor connections
		Slot			No aux options	
		Box	CS141 Advanced		Optional sensors	
		Slot			Aux connection	
		Box	CS141 ModBus		ModBus RS-845	
		Slot			Aux connection	
	I/O options	Alarm buzzer CS141			Buzzer, 60 dB	5 m cable
		Relay board CS141			4 digital inputs 4 relay outputs	1 m cable
		Profibus converter			External DIN rail mount device	
		Temperature sensor			–25 °C to +100 °C, ±0.5%	1.8 m cable
		Combisensor for temperature and humidity			–25 °C to +100 °C, ±0.5% 0% to 100% RH, ±5%	1.8 m cable
	Sensor manager options	Sensor manager			Environmental interface	
		Temperature sensor			0 °C to +100 °C, ±0.5%	5 m cable
		Combisensor for temperature and humidity			0 °C to +100 °C, ±0.5% 0% to 100% RH, ±5%	5 m cable
		Alarm buzzer			85 dB	5 m cable
		Relay box			1 input contact 1 output contact	5 m cable
	RCCMD	RCCMD license			For Windows, Linux, MAC X, OS / 2, UNIX, NOVELL	
		RCCMD license			For IBM AS 400 V4R5, V5, V6, V7	
		RCCMD enterprise license			>50 licenses (Windows, Linux, MAC X, OS / 2, UNIX, NOVELL)	


USHA+	Network interface**	USHA+ network interface card	Web / SNMP interface ModBus TCP	Sensor connections
	Environmental	EMD with temperature and humidity sensors	0 °C to +80 °C, ±1 °C 10% to 90% RH, ±3%	2 m cable
		Vibration detector		1 m cable
		Smoke detector		
		Door contact detector		
		Water leakage detector		
		Water leakage detector		

* All CS141 cards / boxes come with one free RCCMD client and a CD containing the monitoring software.
** All USHA+ cards come with RCCMD client and a CD containing the monitoring software.

Connectivity and sensor options for CS cards and boxes

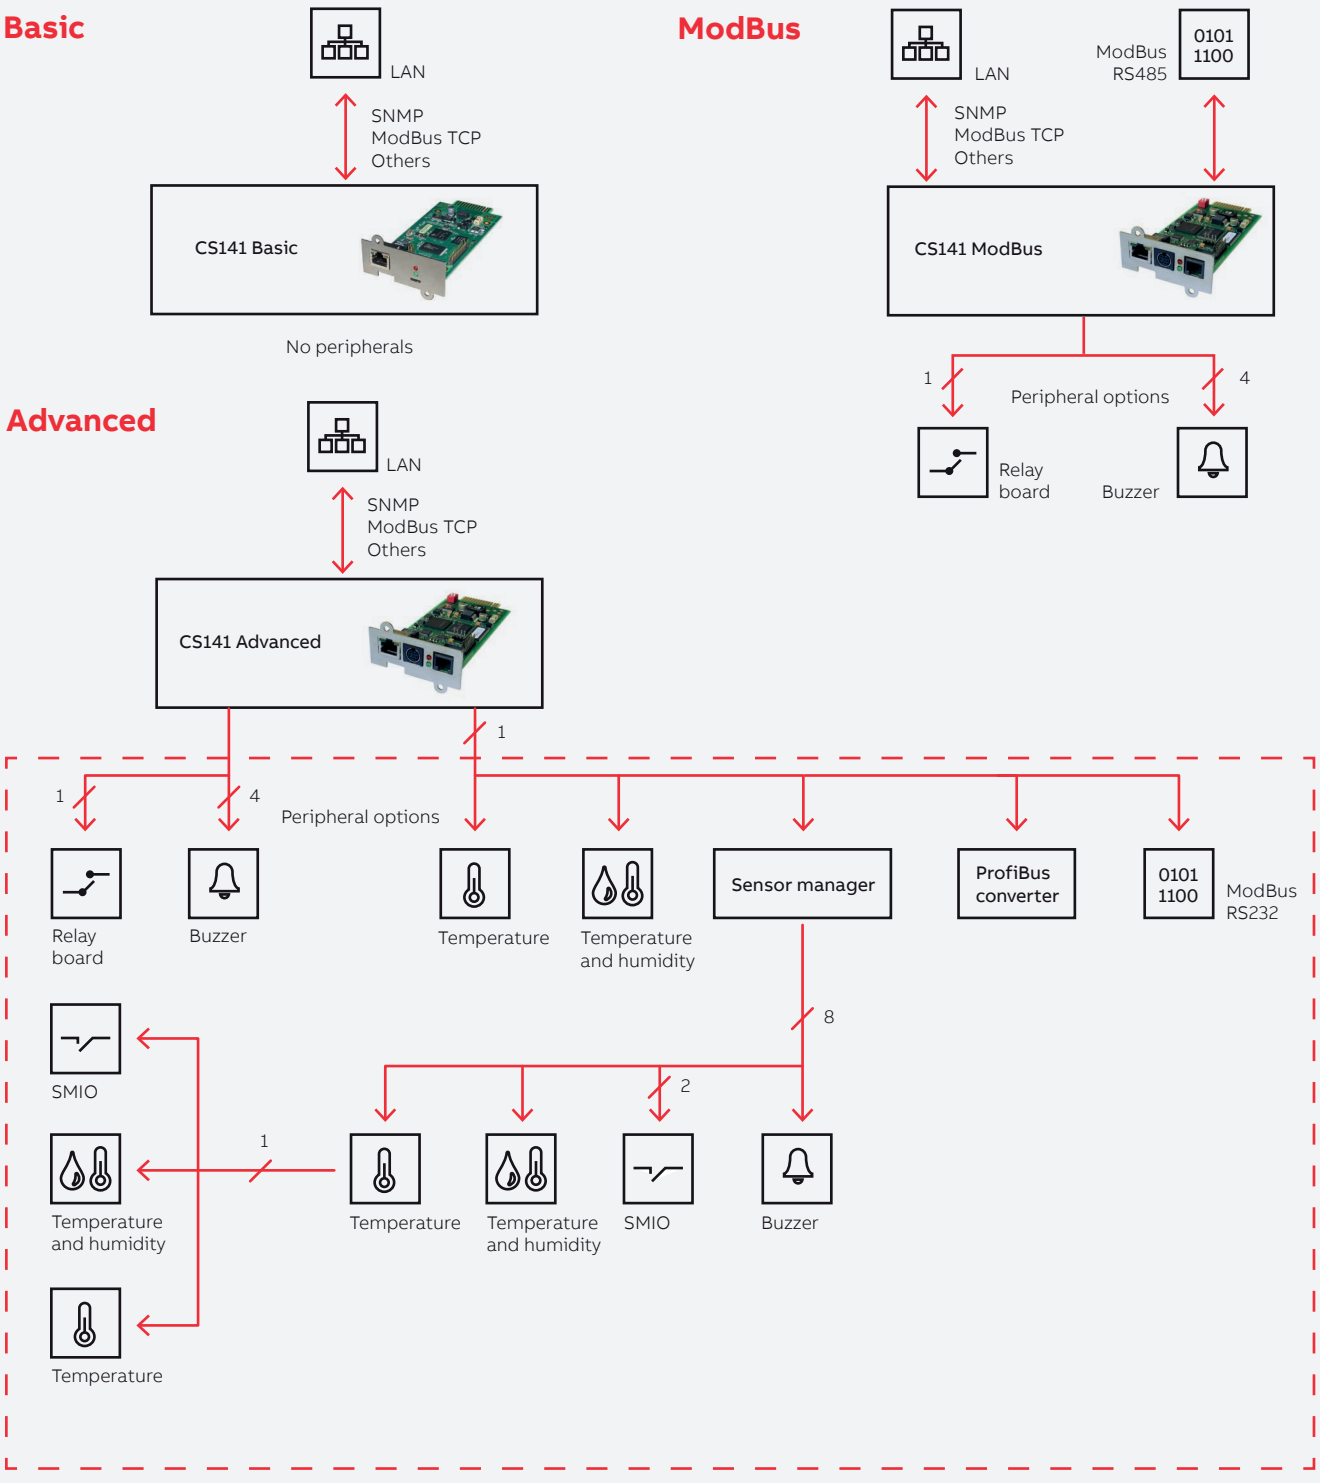

Connectivity and sensor options for USHA+ card

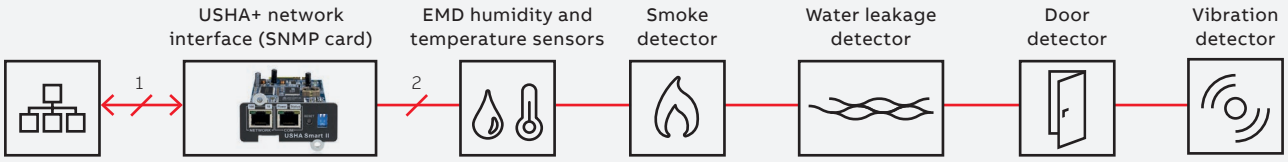

—
abb.com/ups

© Copyright 2017 ABB. All rights reserved.
Specifications subject to change without notice.

4NWP101485R0001_EN