M10608 – Heat pump with extra water heater

Application


Houses with large hot water demand.

Function

This connection is used when the heat pump is installed in houses with a large hot water demand.

If the heater is equipped with a valve connection Ø of 15 mm, this should be changed for one of Ø 22 mm.

Appropriate heater is COMPACT 100-300 for floor mounting and EMINENT 35-100 for wall mounting.

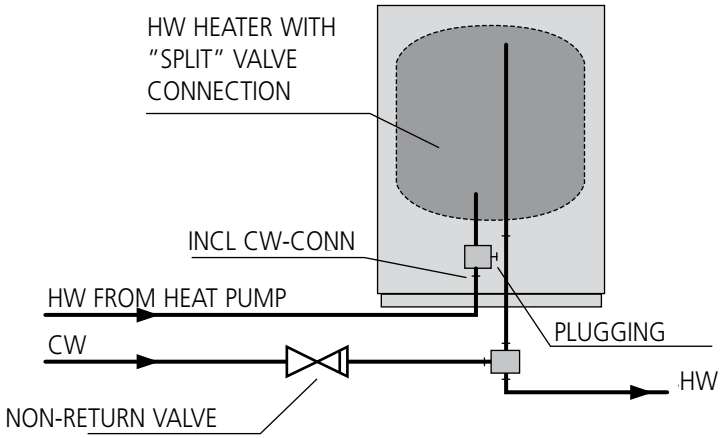

See the appropriate "Installation and Maintenance Instructions" for more information.

Note! This is an outline diagram. Actual installations must be planned according to applicable standards.

NIBE AB - Villavärme Box 14, 285 21 Markaryd Tel 0433 - 73 000 Fax 0433 - 73 190 www.nibe.se